



消防處

Fire Services Department

FSD Connects with the Relevant Industries of Dangerous Goods

26 August 2022

AGENDA

Welcoming Address

Mr. LAI Wai-hei

Topic 1: Four Major Enhancements of the
New DG Regulatory Regime

Mr. CHEUNG Pit-shing

Topic 2:
Application for Store and Use Licence

Mr. CHEUK Wa-lun

Topic 3:
Application for Conveyance Licence

Mr. YEUNG Ka-wai, Kevin

Q & A Session

All Speakers



消防處

Fire Services Department

Welcoming Address

Divisional Officer

LAI Wai-hei

Dangerous Goods Legislation Division

Licensing and Certification Command

Fire Services Department



Manufacture



Store and Use




Conveyance

Licensing



PML Requirements





消防處

Fire Services Department

Four Major Enhancements of the New DG Regulatory Regime

Acting Assistant Divisional Officer

CHEUNG Pit-shing

Dangerous Goods Legislation Division

Licensing and Certification Command

Fire Services Department

Enhancement to the Classification System



Enhancement to the Classification System



Class 2.1 / 2.2 / 2.3



Class 3



Class 3A



Class 4.1 / 4.2 / 4.3



Class 5.1 / 5.2



Class 6.1




Class 8



Class 9

Enhancement to the Classification System

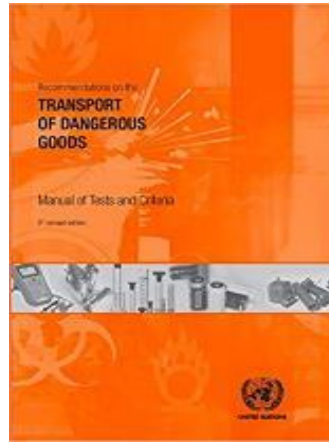

Recommendations on the Transport of Dangerous Goods by United Nations



Sea



Road



Air


Enhancement to the Classification System

Repealed Legislation			Amended Legislation		
DG	Label	<u>Cat.</u>	<u>Class</u>	Label	DG
Compressed Gases		Cat. 2	Class 2		Gases
Substances giving off inflammable vapour		Cat.5 Class 1/2	Class 3		Flammable Liquids
Corrosive Substances		Cat.3	Class 8		Corrosive Substances

Enhancement to the Classification System




Class 8

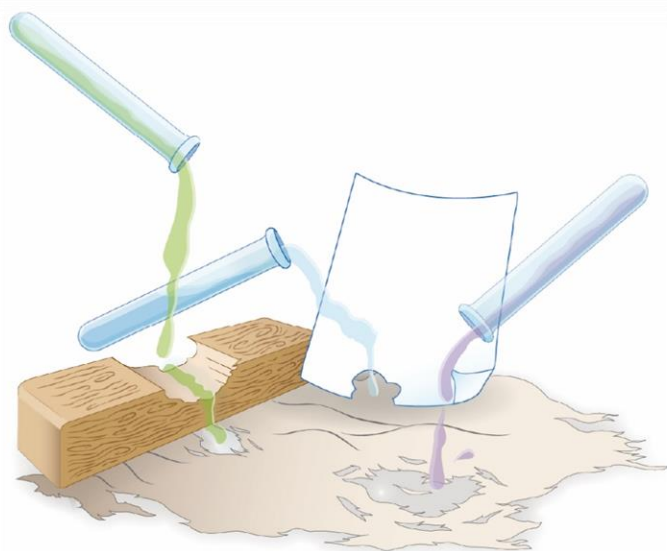

Packing Group	Exposure Time	Observation Period	Effect
I	$\leq 3 \text{ min}$	$\leq 60 \text{ min}$	Irreversible damage of intact skin
II	$> 3 \text{ min} \leq 1 \text{ h}$	$\leq 14 \text{ d}$	Irreversible damage of intact skin
III	$> 1 \text{ h} \leq 4 \text{ h}$	$\leq 14 \text{ d}$	Irreversible damage of intact skin
III	—	—	Corrosion rate on either steel or aluminium surfaces exceeding 6.25 mm a year at a test temperature of 55°C when tested on both materials

How to Ascertain DG Classification?

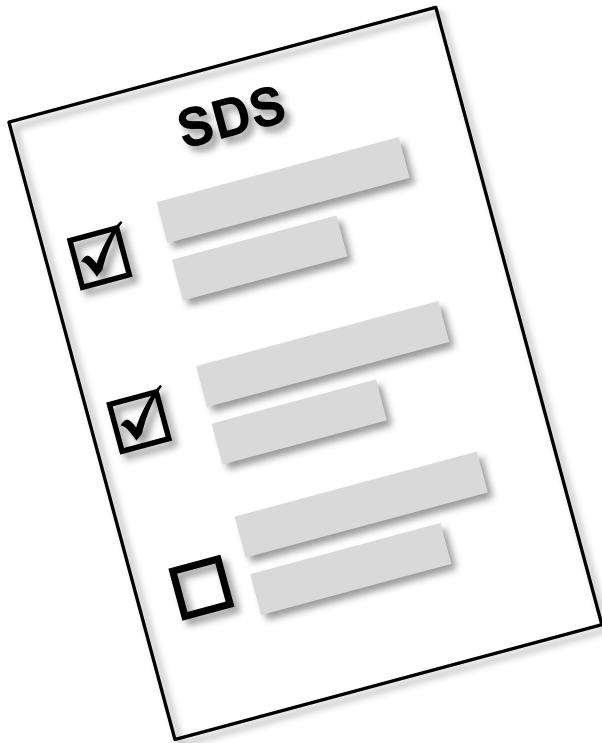


Safety Data Sheet

> 1,700 types of DG



DG Thematic Website
www.hkfsd.gov.hk/dg

How to Ascertain DG Classification?

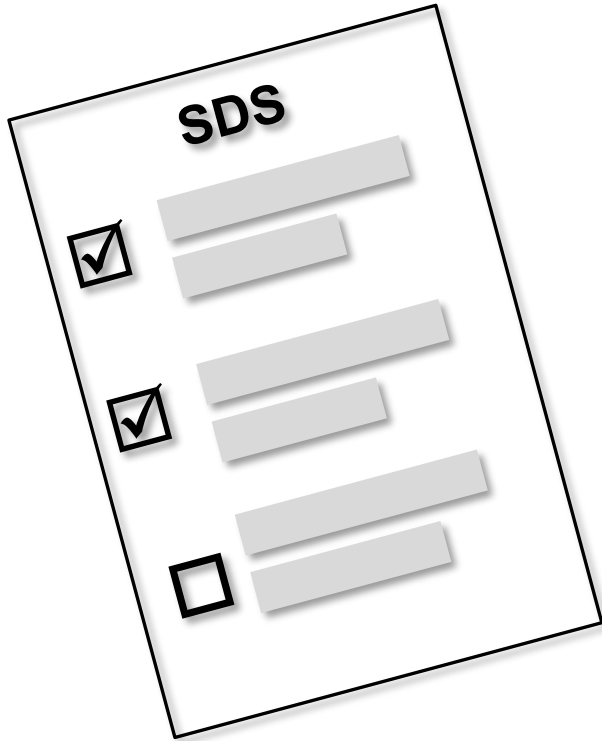

Safety Data Sheet

Example:


Section 14 Transport Information

UN number : UN 1230


Proper Shipping Name : Methanol

Class : 3

Subsidiary Hazard: 6.1

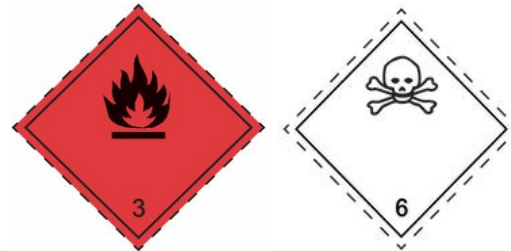

How to Ascertain DG Classification?

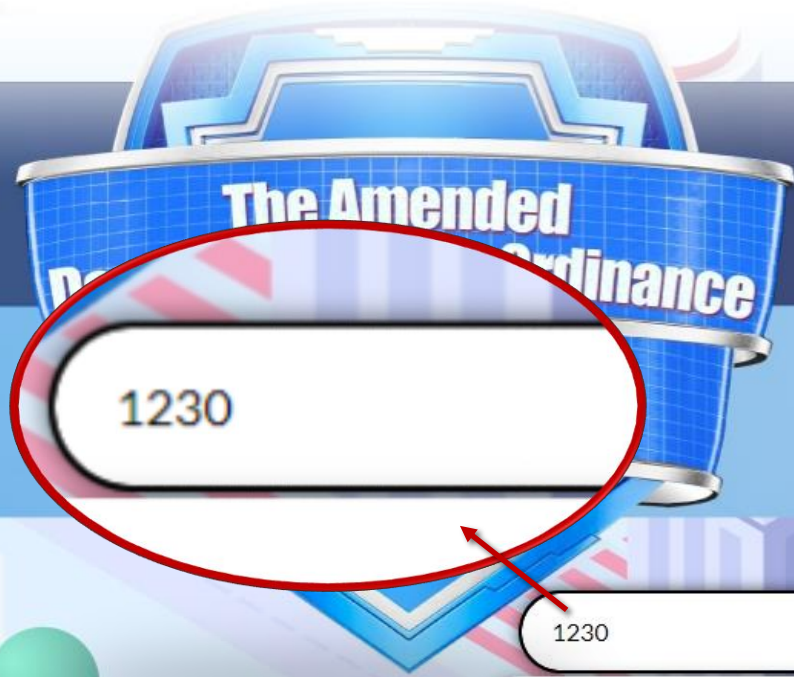

Proper Regulation of Dangerous Goods Better Protection for Our Home and Lives

24-Month Transitional Period
Enhancing safety • Facilitating public and trades

1230

1230 METHANOL / PG II, Class: 3, Subsidiary Hazard: 6.1, Packing Group: BP001


How to Ascertain DG Classification?

< **Dangerous Goods Search**

UN No. / HK No.	1230
Proper Shipping Name / Packing Group (if any)	METHANOL / PG II
Class	3
Subsidiary Hazard	6.1
General Exempt Quantity	25
Industrial Exempt Quantity	150
Special Exempt Quantity	None
Limited Quantity	1
Maximum Package Size	None
Specifications	-
Supplementary Notes (Appendix 4)	279
Packing (Appendix 5)	
Basic Packing Instructions (BP)	BP001
Special Packing Instruction (SP)	-
Compatibility	-

UN No. / HK No.	1230
Proper Shipping Name / Packing Group (if any)	METHANOL / PG II
Class	3
Subsidiary Hazard	6.1
General Exempt Quantity	25
Industrial Exempt Quantity	150
Special Exempt Quantity	None

Enhancement to the Scope of Exemption

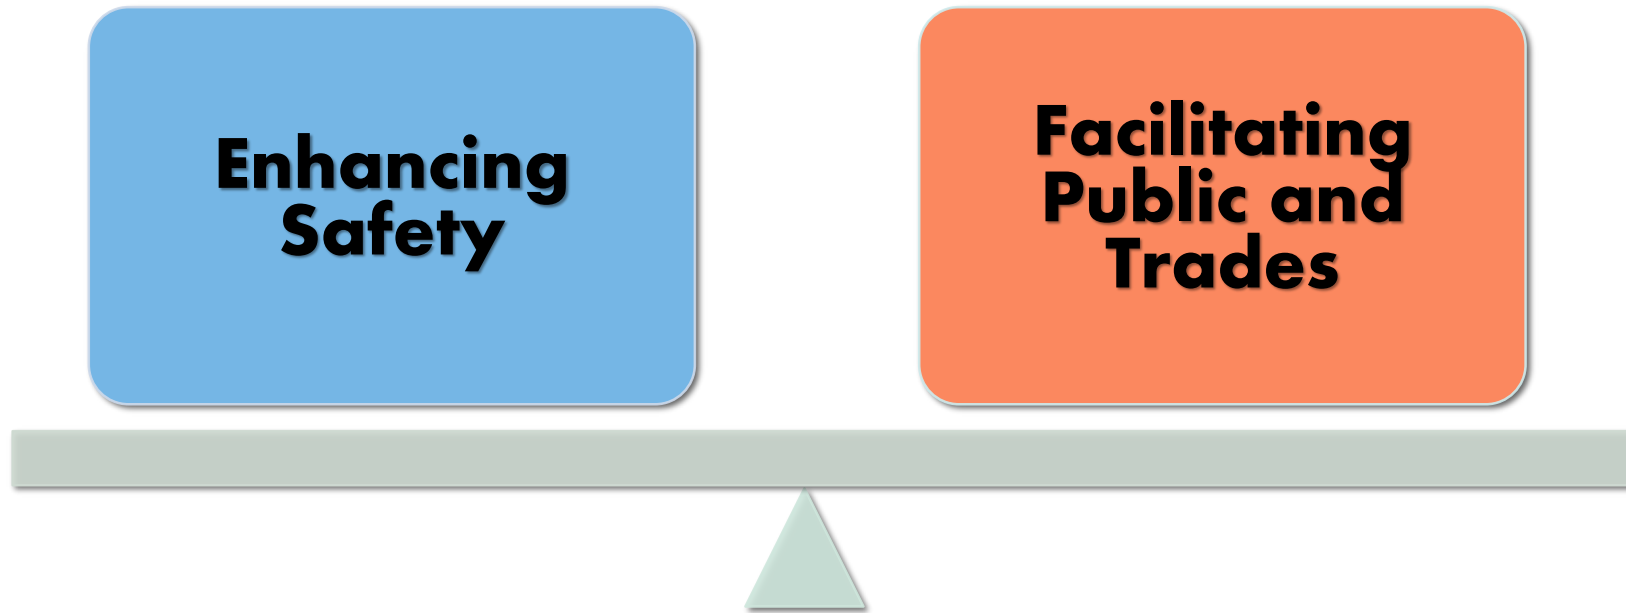


Enhancement to the Scope of Exemption



Substances that are **not regulated** by the DGO



Enhancement to the Scope of Exemption

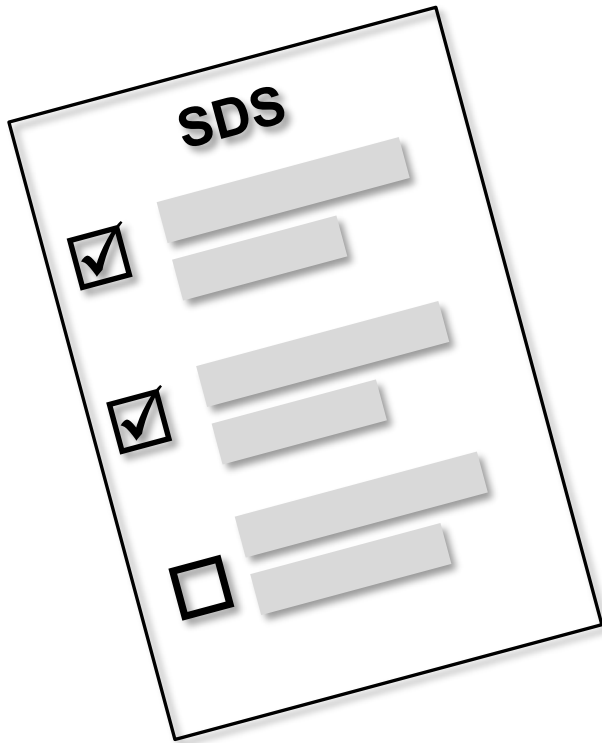

Safety Data Sheet

Example:

Section 14 Transport Information

UN number : UN 1851

Proper Shipping Name :

MEDICINE, LIQUID, TOXIC, N.O.S.



Enhancement to the Scope of Exemption



1851

-Class-



-Subsidiary Hazard-



-Maximum Package Size-



-Compatibility-



No record found.

Enhancement to the Scope of Exemption



Industrial
Exempt
Quantity




Example:

UN 1001
ACETYLENE, DISSOLVED
Class 2.1



UN 1072
OXYGEN, COMPRESSED
Class 2.2

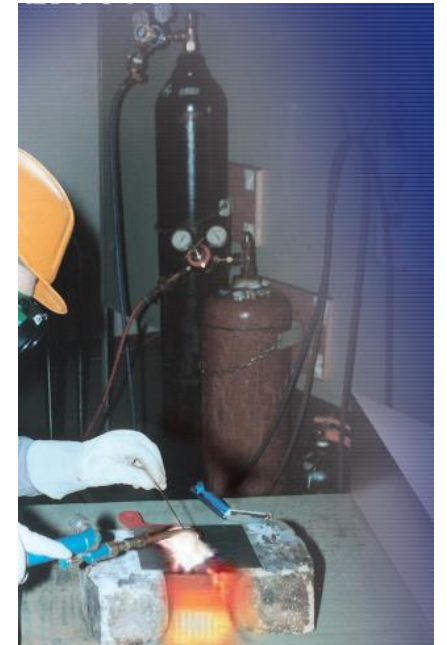

Enhancement to the Scope of Exemption

Repealed Legislation		Amended Legislation	
DG	Exempt Quantity	Industrial Exempt Quantity	DG
Acetylene	2 Cylinders	300 Litres	Acetylene, Dissolved (UN 1001)
Oxygen	2 Cylinders	300 Litres	Oxygen, Compressed (UN 1072)
Aggregate Limit	2 Pairs Only	450 Litres = up to ~5 Pairs (assuming 45 Litres water capacity each)	




Industrial
Premises



Enhancement to the Scope of Exemption

Water Capacity to determine
exempt quantity of Class 2 DG

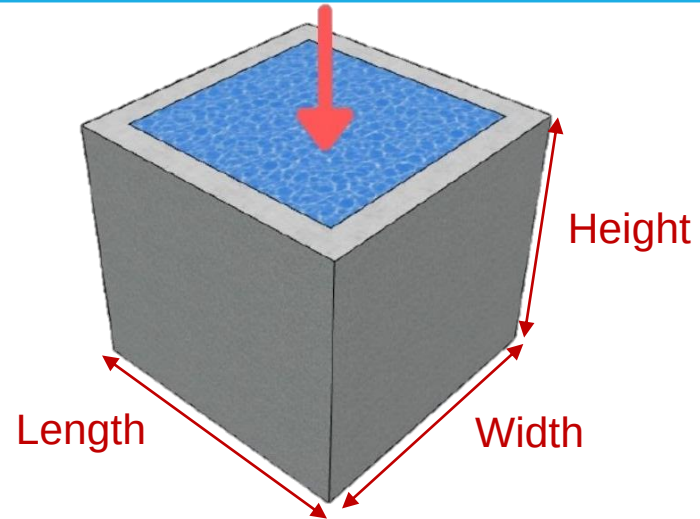

Example:

UN 1013
Carbon Dioxide
Class 2.2



Enhancement to the Scope of Exemption

Repealed Legislation		Amended Legislation	
DG	Exempt Quantity	General Exempt Quantity	DG
Carbon Dioxide	1 Cylinder	150 Litres	Carbon Dioxide (UN1013)



1 cylinder only



7 pressure receptacles = ~140 Litres
(assuming 20 Litres water capacity each)

Enhancement to the Packing, Marking & Labelling (PML) Requirements




UN No.
Proper Shipping Name



Enhancement to the PML Requirements

Out-to-date Requirements Deleted

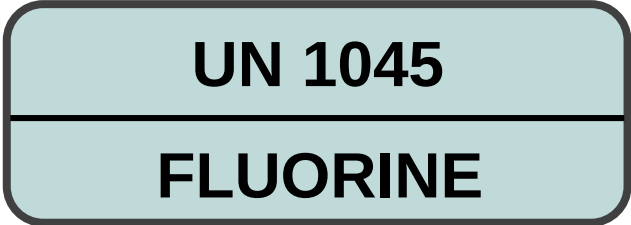Repealed Legislation	Amended Legislation
Colour marking of gas cylinder	Marking & Labelling Requirements Updated
r. 65 of the repealed Cap. 295B: the head should be painted conspicuously (i) Red (flammable) (ii) Yellow (poisonous) (iii) Red and Yellow (flammable and poisonous)	Marking:  Labelling: 

Enhancement to the PML Requirements


PML Requirements under s.142 of Cap. 295G

Packing



Basic Packing Instructions
Special Packing Instructions

Marking

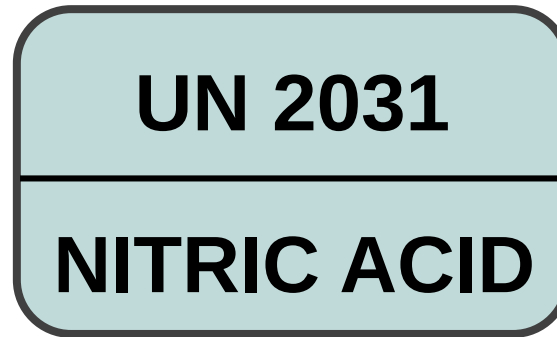

UN No. and
Proper Shipping Name /
True Name

Labelling



Labels for Class 5.1 and
Subsidiary Hazard of 8

Enhancement to the PML Requirements

DG in Limited Packs

Packing



Nitric Acid / PGII

- (1) Water Capacity: 800 ml
< Limited Quantity (1 Litre)
- (2) Glass Bottle fulfilling BP001

Marking

Exempted

Labelling

Exempted

< Dangerous Goods Search

UN No. / HK No.	2031
Proper Shipping Name / Packing Group (if any)	NITRIC ACID / PG II
Limited Quantity	1

Enhancement to the PML Requirements

Enhancement to Approval Mechanism

* Approval of Pressure Receptacle is not required

Limited Packs



Non-refillable



Class 2
 ≤ 1 L



Class 2.1 or 2.2
 ≤ 25 L



Class 2.1 or 2.2
 ≤ 5 L

≤ 35 Bar

≤ 250 Bar

* For details, please refer to s. 145(2) of Cap. 295G

Enhancement to the PML Requirements

Enhancement to Approval Mechanism


Repealed Legislation	Amended Legislation
Cylinder Approval	Pressure Receptacle Approval (Special Packing Requirement)
Yes	Yes (exemptions under s.145(2) of Cap. 295G)



Enhancement to the PML Requirements


Effect of Compliance with IMDG Code*

Packing

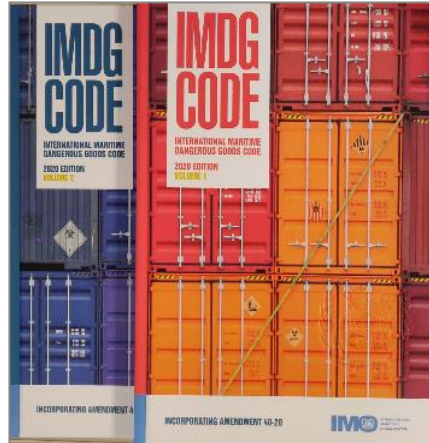


IMDG Code

Marking



Labelling

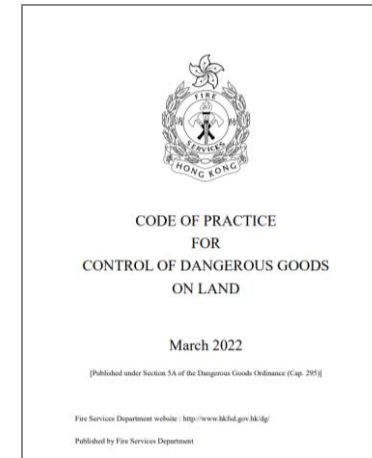

Code of Practice for
Control of DG on Land

* s. 143 of Cap. 295G

* Except Class 2 and Class 3A DG

Enhancement to the Business Environment



Enhancement to the Business Environment

DGCP



Maximum Package Size

< Dangerous Goods Search	
UN No. / HK No.	1791
Proper Shipping Name / Packing Group (if any)	HYPOCHLORITE SOLUTION / PG III
Class	8
Subsidiary Hazard	None
General Exempt Quantity	250
Industrial Exempt Quantity	250
Special Exempt Quantity	None
Limited Quantity	5
Maximum Package Size	5
Specifications	Mixtures of a Hypochlorite 次氯酸鹽與銨鹽的混合物
Supplementary Notes (Appendix 4)	274
Packing (Appendix 5)	
Basic Packing Instructions (BP)	BP001
Special Packing Instruction (SP)	-
Compatibility	CG8

1791

HYPOCHLORITE SOLUTION / PG III

5

Enhancement to the Business Environment

< Dangerous Goods Search

UN No. / HK No.	1230
Proper Shipping Name / Packing Group (if any)	METHANOL / PG II
Class	3
Subsidiary Hazard	6.1
General Exempt Quantity	25
Industrial Exempt Quantity	150
Special Exempt Quantity	None
Limited Quantity	1
Maximum Package Size	None
Specifications	-
Supplementary Notes (Appendix 4)	279
Packing (Appendix 5)	
Basic Packing Instructions (BP)	BP001
Special Packing Instruction (SP)	-
Compatibility	-

**Shall not
be
treated
as DGCP**

< Dangerous Goods Search

UN No. / HK No.	1791
Proper Shipping Name / Packing Group (if any)	
Class	
Subsidiary Hazard	
General Exempt Quantity	
Industrial Exempt Quantity	
Special Exempt Quantity	
Limited Quantity	5
Maximum Package Size	5
Specifications	Mixtures of a Hypochlorite with an ammonium salt is prohibited. 次氯酸鹽與銨鹽的混合物屬違禁品。
Supplementary Notes (Appendix 4)	274
Packing (Appendix 5)	
Basic Packing Instructions (BP)	BP001
Special Packing Instruction (SP)	-
Compatibility	CG8




Enhancement to the Business Environment

DGCP



Enhancement


Consumer Pack
Exempt Quantity



Class	Consumer Pack EQ (uninhabited compartment) (L/Kg)	Consumer Pack EQ (warehouse) (L/Kg)
Class 2 (e.g. Aerosol)	1000	5000
Class 3 (PG II) (e.g. Ethanol)	300	1500
Class 3 (PG III) (e.g. Adhesive)	1000	5000
Class 4.1, 5.1, 6.1 or 8 (e.g. Bleach)	1000	5000
<u>Aggregate DGCP EQ</u>	<u>1000</u>	<u>5000</u>

Enhancement to the Business Environment

DGCP



Enhancement

Exempt from
PML Requirements



UN 1170
ETHANOL



Exempt from
Conveyance Licence





Enhancement to the Business Environment

Repealed Legislation

→ Only DG of same Category in the same Licensed Store

Amended Legislation

→ Compatible Class 4 to 9 DG in the same Licensed Store



Enhancement to the Business Environment

Repealed Legislation		Amended Legislation	
Chloroform	Cat. 4	Class 6.1 	Chloroform (UN 1888)
Hydrogen Peroxide (10%)	Cat. 7	Class 5.1 	Hydrogen Peroxide (UN 2984)
Benzaldehyde	Cat. 5	Class 9 	Benzaldehyde (UN 1990)
DG Stores required	3	 1 ONLY	DG Stores required

One-Stop Information Portal

DG Thematic Website




DG Search Function

1230

1230 METHANOL / PG II, Class: 3, Subsidiary Hazard: 6.1, Packing Group: BP001

Code of Practice

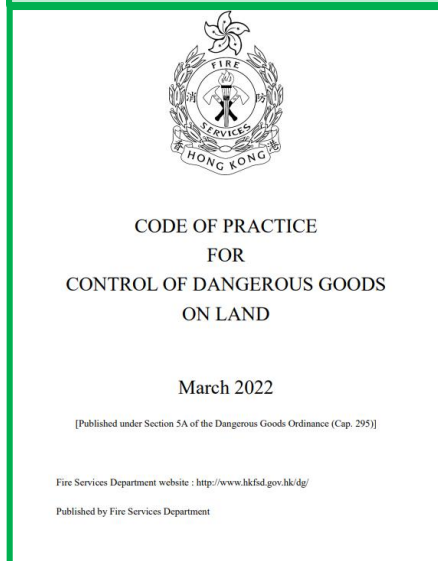

Pamphlets



“Application Guide” for Licence & Approval



Code of Practice for Control of DG on Land



❖ Statutory Document:

→ issued under section 5A of the DGO by the D of FS

❖ Practical Guidance:

→ in respect of the requirements under the DGO

❖ Important Technical Resource:

→ to help the DG practitioners to comply with legal requirements



CODE OF PRACTICE FOR CONTROL OF DANGEROUS GOODS ON LAND

March 2022

[Published under Section 5A of the Dangerous Goods Ordinance (Cap. 295)]

Fire Services Department website : <http://www.hkfsd.gov.hk/dg/>

Published by Fire Services Department

Part I: **General Provisions**

Part II: **Classification and Compatibility of DG**

Part III: **Packing, Marking and Labelling**

Code of Practice for Control of DG on Land



Part IV: Packing and Special Packing Requirements for Pressure Receptacle containing Class 2 DG

Gas Industry, Users of Pressure Receptacles

Part V: Decommissioning of Tank

Owner of Tanks which are used to contain DG

Part VI: Safety Precautions for Conveyance of Classes 2, 3 and 3A DG

Trades of DG Transport

Appendix I to III: DG List

Appendix IV: Supplementary Notes for DG List

Appendix V: Basic Packing Instructions



CODE OF PRACTICE
FOR
CONTROL OF DANGEROUS GOODS
ON LAND

March 2022

[Published under Section 5A of the Dangerous Goods Ordinance (Cap. 295)]

Fire Services Department website : <http://www.hkfsd.gov.hk/dg/>

Published by Fire Services Department

A Guide to Application for DG Licence and Approval



Part 1: **General Information**

Part 2 (Chapter 2.1 to 2.4): **Licensing and Approval of S2DG**

Chapter 2.1: **Conveyance Licence**

Potential / Existing
Licensees (DG Vehicles)

Chapter 2.2: **Store and Use Licence, Manufacture Licence, Approval of Tank**

Potential / Existing
Licensees (DG Storage)

Chapter 2.3: **Ventilation and Electrical Installation**

Potential / Existing
Licensees (DG Storage)

Chapter 2.4: **Special Gases in the Microelectronics Industry**

Microelectronics Industry



A Guide to Application for DG Licence and Approval



Part 3 (Chapter 3.1 to 3.2):
Approved Person and Pressure Receptacle

Chapter 3.1:
Status of Approved Person

Gas Industry, Users of
Pressure Receptacles

Chapter 3.2:
Pressure Receptacle Approval

Gas Industry, Users of
Pressure Receptacles

Part 4: Miscellaneous
Chapter 4.1: **Notification of Storage of Class 9A DG**

Industries storing Cl.9A
DG, e.g. rubber tyres

Appendix I to VII:
Sample of Fire Safety Requirements (DG Vehicles)

Potential / Existing
Licensees (DG Vehicles)

Appendix VIII to X:
Sample of Fire Safety Requirements (DG Stores)

Potential / Existing
Licensees (DG Storage)




申請危險品牌照及批准指南

(適用於第 2 至第 9A 類危險品，
不包括受香港法例第 51 章《氣體安全條例》
管制的石油氣及其他氣體)

消防處
08/2022

24-month Transitional Period

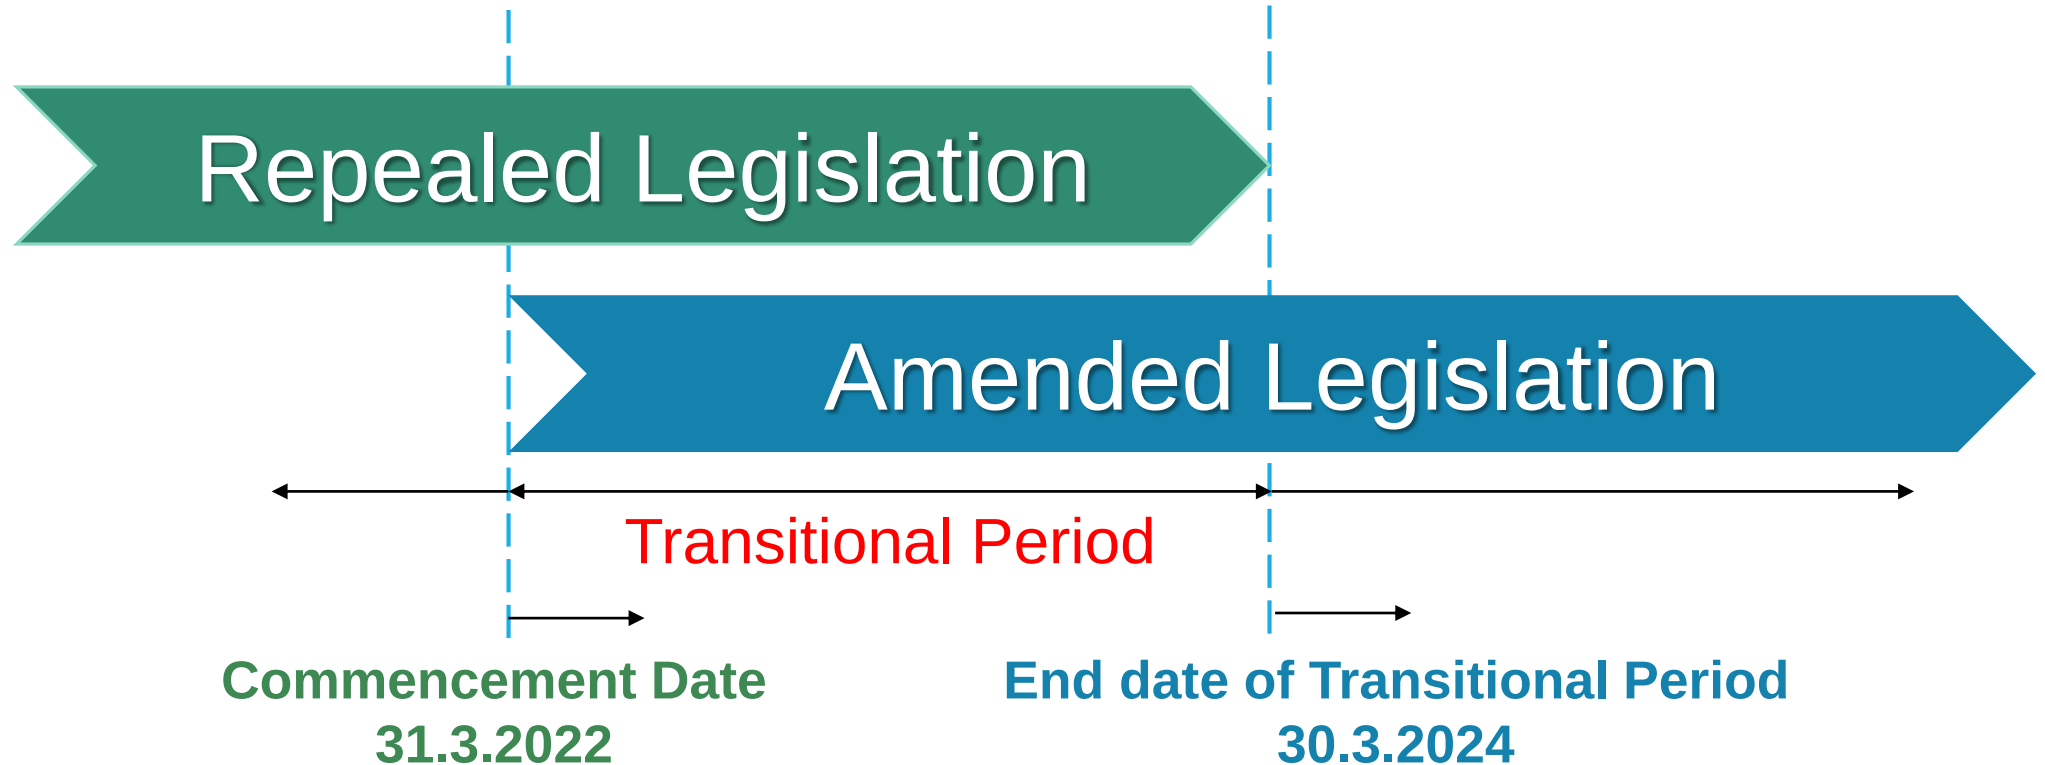



消防處

Fire Services Department

Thank You!





消防處

Fire Services Department

How to Apply for Store and Use Licence

Senior Station Officer

CHEUK Wa-lun

Dangerous Goods Control Division


Licensing and Certification Command

Fire Services Department

Topics

- ◆ **Application workflow**
- ◆ **Documents required**
- ◆ **New Fire Safety Requirements and Addendum**

Application Workflow

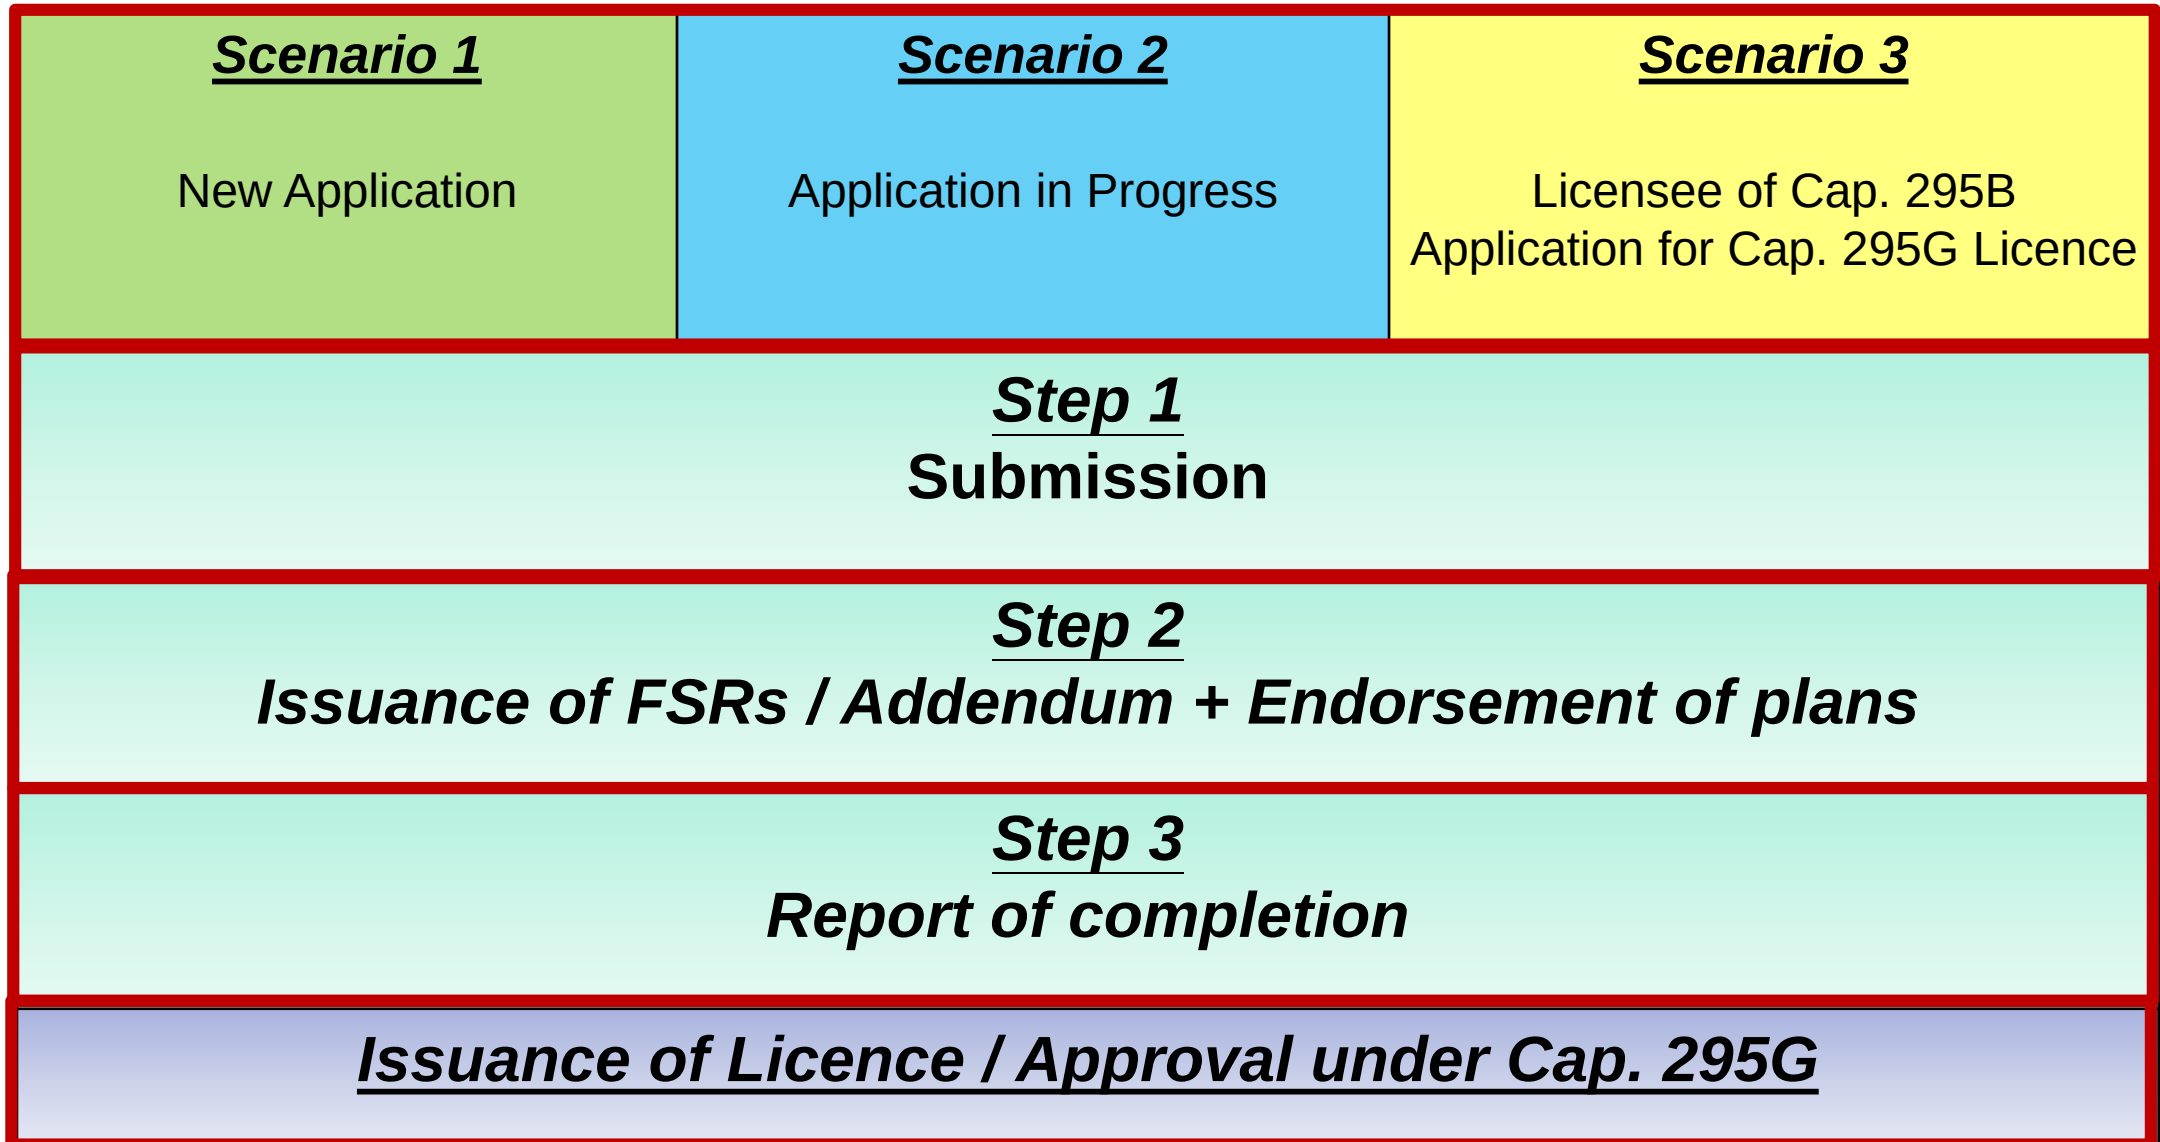

Reference



“Application Guide” for Licence & Approval



DG Thematic Website www.hkfsd.gov.hk/dg

Documents required


FIRE SERVICES DEPARTMENT
香港消防處
Application for / Renewal of
Manufacture Licence for Schedule 2 Dangerous Goods /
Store and Use Licence for Schedule 2 Dangerous Goods
附表 2 危險品製造牌照/附表 2 危險品貯存暨使用牌照的申請/續期
[This form is only applicable to application / renewal of licence during transitional period]
[此表格只適用於過渡期間的牌照申請/續期]

Section A 甲部
Part 1: Nature of Application
第一部份：申請類別

☐ Renewal Application under Dangerous Goods (General) Regulations, Cap. 295B
根據第 295B 章《危險品(一般)規例》申請續牌
*The last valid date to be endorsed on Cap. 295B Licence is 30 March 2024
*Cap. 295B 牌照可能註的最後有效日期為 2024 年 3 月 30 日
Please skip Parts 4 & 5 of Section D
不用填寫丁部第四及第五部份

☐ Licence Application under Dangerous Goods (Control) Regulation, Cap. 295G
根據第 295G 章《危險品(管制)規例》申請牌照
*Applicable to i) New Applicant and ii) Cap. 295B Licensee
*適用於 i) 新申請人 和 ii) 第 295B 牌照持牌人
☐ Renewal Application under Dangerous Goods (Control) Regulation, Cap. 295G
根據第 295G 章《危險品(管制)規例》申請續牌
*Applicable to Cap. 295G Licensee
*適用於第 295G 牌照持牌人
Please skip Parts 4 & 5 of Section D
不用填寫丁部第四及第五部份

Section B 乙部
Part 2a: Particulars of Applicant (Please attach supplementary sheet(s) if space provided is insufficient)
第二 a 部份：申請人資料 (如空間不足應用，請另用附頁)

☐ Applicant is a company 申請人為公司
☐ Applicant is an individual / a sole proprietorship / a partnership 申請人為個人/ 獨資業務/ 合夥業務

Licence Number 牌照編號	Expiry Date 屆滿日期 (DD/MM/YYYY)
<i>(For renewal only)</i> <i>[只適用於續牌]</i>	
Name of Applicant 申請人名稱	(English) (中文)

Application Form



2 sets Hazardous Area plans

SAFETY DATA SHEET
Flammosol

1. IDENTIFICATION
Product Identifiers
Product name: Flammosol
Brand: Madeup Chemical Co.
CAS-No.: 001-01-0
Product Number: 1000000
Index-No.: 000-000-00-01

Recommended use of the chemical and restriction on use

Company Details
Madeup Chemical Company
999 Chemical Street
Chemical Town, My State
Tel No.: 1300 000 000
Email: info@madeupchemical.com.au
Website: www.madeupchemicalcompany.com.au

Emergency telephone number
Emergency Tel No.: 1300 000 001

2. HAZARDS IDENTIFICATION
Classification of the substance or mixture
Flammable liquids (Category 2)
Acute Toxicity – Oral (Category 2.3)
Skin corrosion / irritation (Category 2)
Label elements
Pictograms:



Signal word: Danger
Hazard statement(s):
H225 Highly flammable liquid and vapour
H302 Toxic if swallowed
H302 Harmful if swallowed
H315 Causes skin irritation
Precautionary statement(s):
P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
P231 Keep container tightly closed
P241 Use explosion proof electrical equipment
P242 Use only non-sparking tools
P243 Take precautionary measures against static discharge
P264 Wash hands thoroughly after handling
P270 Do not eat, drink or smoke when using this product
P281 Use personal protective equipment as required
IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
Store in a well-ventilated place. Keep cool.

Page 1 of 5

Safety Data Sheet (SDS)

- BRC / HKID
- BRC of the agent
- Authorization letter for agent
- Plan of use area

Other Documents

Application form



The screenshot shows the top section of the Fire Services Department website. At the top left is the Fire Services Department logo and the text "Fire Services Department" and "The Government of the Hong Kong Special Administrative Region". To the right are font size controls (A A A) and language options (EN 繁 简). Further right are a home icon and a menu icon, with a large red arrow pointing to the menu icon. The main banner features a blue and white design with the text "The Amended Dangerous Goods Ordinance", "March 31, 2022 Effective", "Proper Regulation of Dangerous Goods", "Better Protection for Our Home and Lives", and "24-Month Transitional Period". Below this is a search bar with the placeholder text "Search Dangerous Goods by UN/HK Number or Proper Shipping Name" and a magnifying glass icon. The background of the banner shows a stylized city street with cars and trees. In the bottom right corner of the banner is a red circular icon with the text "DANGEROUS GOODS". The word "Video" is visible in the bottom left corner of the banner area.

Application form

The screenshot displays the Fire Services Department website for the Amended Dangerous Goods Ordinance, effective March 31, 2022. The page features a header with the department's logo, name, and language options (English, Chinese, and Simplified Chinese). A red arrow points to the menu icon in the top right corner. The main content area includes a search bar and a grid of eight icons representing different sections: Regulation of Dangerous Goods, What are Dangerous Goods?, Packing, Marking and Labelling, Licence, Pressure Receptacle, Information and Statistics, Frequently Asked Questions, and Contact Us. A red arrow points to the 'Licence' icon. The page also includes a 'Video' section on the left and a 'Search Dangerous Goods by UN/HK Number or Proper Shipping Name' bar.

Fire Services Department
The Government of the Hong Kong Special Administrative Region

EN 繁 简

The Amended Dangerous Goods Ordinance
March 31, 2022
Effective

Search Dangerous Goods by UN/HK Number or Proper Shipping Name

Regulation of Dangerous Goods

What are Dangerous Goods?

Packing, Marking and Labelling

Licence

Pressure Receptacle

Information and Statistics

Frequently Asked Questions

Contact Us

Video

Application form



Fire Services Department
The Government of the Hong Kong Special Administrative Region

[A](#) [A](#) [A](#) | [EN](#) 繁 简



The Amended Dangerous Goods Ordinance
March 31, 2022
Effective

Search Dangerous Goods by UN/HK Number or Proper Shipping Name



Fire Services Department
The Government of the Hong Kong Special Administrative Region

[A](#) [A](#) [A](#) | [EN](#) 繁 简





Regulation of Dangerous Goods



What are Dangerous Goods?



Packing, Marking and Labelling



Licence



Information and Statistics



Frequently Asked Questions



Contact Us

LICENCE

A Guide to Application for Dangerous Goods Licence and Approval

Industrial Buildings with Licensed Dangerous Goods Stores

Invalid Dangerous Goods Vehicle Licence

Form


Home > Licence > A Guide to Application for Dangerous Goods Licence and Approval

A Guide to Application for Dangerous Goods Licence and Approval

Download in Full >

DANGEROUS GOODS

Application form

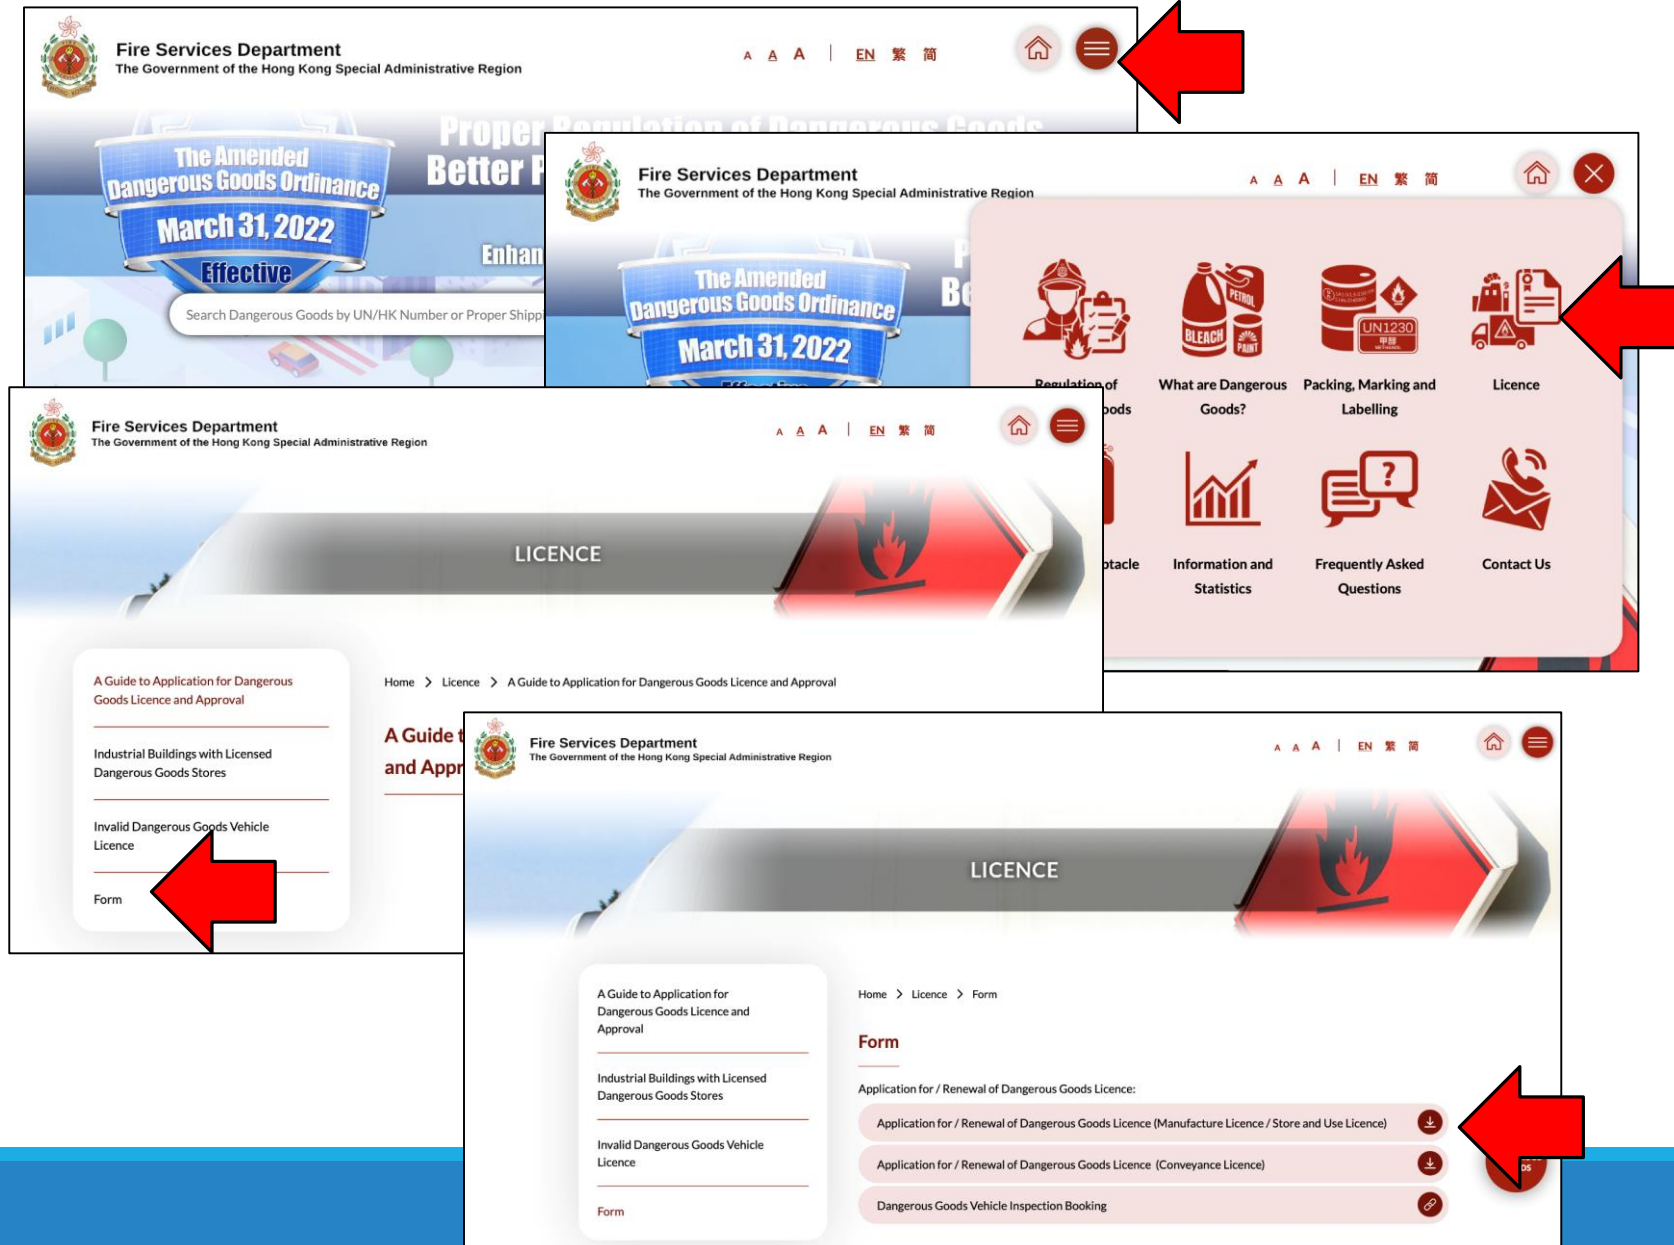

Application form

The collage illustrates the navigation process on the Fire Services Department website:

- Top Screenshot:** The home page with the Fire Services Department logo and navigation links. A red arrow points to the menu icon.
- Second Screenshot:** The 'Licence' section page, showing a sidebar with links like 'A Guide to Application for Dangerous Goods Licence and Approval' and 'Form'. A red arrow points to the 'Form' link.
- Third Screenshot:** The 'Form' page, displaying the 'Application for / Renewal of Dangerous Goods Licence' section. A red arrow points to the 'Application for / Renewal of Dangerous Goods Licence (Manufacture Licence / Store and Use Licence)' link.
- Bottom Screenshot:** A close-up of the 'Form' page, showing the 'Application for / Renewal of Dangerous Goods Licence (Conveyance Licence)' link.

For Internal Use Only 只供內部填寫

LIFIPS Case No.:

File Ref.:

Receiving Officer:

Receipt Date:

FIRE SERVICES DEPARTMENT

香港消防處

Application for / Renewal of

Manufacture Licence for Schedule 2 Dangerous Goods /

Store and Use Licence for Schedule 2 Dangerous Goods

附表 2 危險品製造牌照/附表 2 危險品貯存暨使用牌照的申請/續期

[This form is only applicable to application / renewal of licence during transitional period]

[此表格只適用於過渡期間的牌照申請/續期]

Section A 甲部

Part 1: Nature of Application

第一部份：申請類別

☐ Renewal Application under Dangerous Goods (General) Regulations, Cap. 295B

根據第 295B 章《危險品(一般)規例》申請續牌

***The last valid date to be endorsed on Cap. 295B Licence is 30 March 2024**

***Cap. 295B 牌照可批註的最後有效日期為 2024 年 3 月 30 日**

Please skip Parts 4 & 5 of Section D

不用填寫丁部第四及第五部份

☐ Licence Application under Dangerous Goods (Control) Regulation, Cap. 295G

根據第 295G 章《危險品(管制)規例》申請牌照

***Applicable to i) New Applicant and ii) Cap. 295B Licensee**

適用於 i) 新申請人 和 ii) 第 295B 章牌照持有人

☐ Renewal Application under Dangerous Goods (Control) Regulation, Cap. 295G

根據第 295G 章《危險品(管制)規例》申請續牌

***Applicable to Cap. 295G Licensee**

適用於第 295G 章牌照持有人

Please skip Parts 4 & 5 of Section D

不用填寫丁部第四及第五部份

Section B 乙部

Part 2a: Particulars of Applicant (Please attach supplementary sheet(s) if space provided is insufficient)

第二 a 部份：申請人資料 (如空位不敷應用，請另用附頁)

☐ Applicant is a company 申請人為公司

☐ Applicant is an individual / a sole proprietorship / a partnership 申請人為個人 / 獨資業務 / 合股業務

Licence Number

牌照編號

(For renewal only)

(只適用於續牌)

Expiry Date

屆滿日期

(DD/MM/YYYY)

Name of Applicant

申請人名稱

(English)

(中文)

Application form

[illegible]

Application form - Section A to D

樣本1



FIRE SERVICES DEPARTMENT

香港消防處

Application for / Renewal of

Manufacture Licence for Schedule 2 Dangerous Goods /

Store and Use Licence for Schedule 2 Dangerous Goods

附表 2 危險品製造牌照/附表 2 危險品貯存暨使用牌照的申請/續期

[This form is only applicable to application / renewal of licence during transitional period]

[此表格只適用於過渡期間的牌照申請/續期]

Section A 甲部			
Part 1: Nature of Application 第一部份：申請類別			
☐ Renewal Application under Dangerous Goods (General) Regulations, Cap. 295B 根據第 295B 章《危險品(一般)規例》申請續牌 *The last valid date to be endorsed on Cap. 295B Licence is 30 March 2024 *Cap. 295B 牌照可批註的最後有效日期為 2024 年 3 月 30 日 # Please skip Parts 4 & 5 of Section D # 不用填寫丁部第四及第五部份			
☒ Licence Application under Dangerous Goods (Control) Regulation, Cap. 295G 根據第 295G 章《危險品(管制)規例》申請牌照 *Applicable to i) New Applicant and ii) Cap. 295B Licensee *適用於 i) 新申請人 和 ii) 第 295B 章牌照持有人			
☐ Renewal Application under Dangerous Goods (Control) Regulation, Cap. 295G 根據第 295G 章《危險品(管制)規例》申請續牌 *Applicable to Cap. 295G Licensee *適用於第 295G 章牌照持有人 # Please skip Parts 4 & 5 of Section D # 不用填寫丁部第四及第五部份			

Section B 乙部			
Part 2a: Particulars of Applicant (Please attach supplementary sheet(s) if space provided is insufficient) 第二 a 部份：申請人資料 (如空位不敷應用，請另用附頁)			
☒ Applicant is a company 申請人為公司 ☐ Applicant is an individual / a sole proprietorship / a partnership 申請人為個人 / 獨資業務 / 合資業務			
Licence Number 牌照編號 (For renewal only) (只適用於續牌)	123456	Expiry Date 屆滿日期 (DD/MM/YYYY)	1.9.2022
Name of Applicant 申請人名稱	CHAN TAI MAN / 陳大文 (English) (中文)		

Business Registration Certificate No. (if any) 商業登記證號碼 (如有)	000-123-456-999	Expiry Date 屆滿日期 (DD/MM/YYYY)	1.10.2024
Company Registration No. (if any) 公司註冊編號 (如有)	1234567		
Correspondence Address of Applicant (Please fill in BLOCK LETTERS) 申請人通訊地址 (請以正楷填寫)	FLAT A, 1/F, HABA BUILDING, CANTON ROAD, TSIM SHA TSUI		
Part 2b: Contact Person of Applicant 第二 b 部份：申請人的聯絡人資料			
Name 姓名	CHAN TAI MAN	HKID Card No. 香港身份證號碼	A123456(7)
Email Address 電郵地址	abc_@gmail.com	Position in Company 職位	Manager
Office Telephone & Mobile Phone No. 辦公室及手提電話號碼	22331234 (Office) 98765432 (Mobile)	Fax No. 傳真號碼	22112211

Section C 丙部	
Part 3: Type of Licence 第三部份：牌照種類	
☐ Type 1 種類一：Manufacture Licence 製造牌照 ☒ Type 2 種類二：Store and Use Licence 貯存暨使用牌照	

Section D 丁部	
Part 4: Particulars of Factory / Store* under Licence Application 第四部份：擬申請牌照的工廠 / 貯存所* 的資料 *Please fill in related information only regarding the licence application 只需填寫與牌照申請相關部分	
Address of proposed factory 工廠地址	For Type 1 適用於種類一 只適用於製造牌照 Example: XX factory, xx Road, Yuen Long Industrial Estate, N.T. 例子：新界元朗工業區 XX 路 XX 工廠
Location(s) at which the S2DG may be manufactured 有關附表 2 危險 品製造地點	For Type 1 適用於種類一 只適用於製造牌照 Example: Manufacturing Area, G/F, Block X, XX factory. 例子：XX 工廠第 X 座地下製造區
Location(s) / Area(s) at which the S2DG may be stored 有關附表 2 危險 品的貯存地點	For Type 2 適用於種類二 DG Store 10, G/F, Block 3, ABC Industrial Building, ABC Road, Tsuen Wan, N.T. / 新界荃灣ABC路ABC工業大廈 3 座地下 10 號危險品倉

Information
of Applicant

Information
of contact
person
(applicant)

DG Store
Location

Information
of Applicant

Application form

Location(s) at which the S2DG may be used (if applicable) 有關附表 2 危險品的使用地點 (如適用)	For Type 2 適用於種類二 *Please submit plan if the location is inexplicable as an address *如無法以地址說明，請提交圖則說明 Workshop No. 5, G/F, Block 3, ABC Industrial Building, ABC Road, Tsuen Wan, N.T / 新界荃灣 ABC路ABC工業大廈 3座地下 5號工作室 **如未能用文字表達，可參考樣本2**							
Purpose of using the S2DG 使用附表 2 危險品的目的	For Type 2 適用於種類二 供予發電機使用							
Part 5: Particulars of S2DG (please attach supplementary sheet(s) if space provided is insufficient) 第五部份：附表 2 危險品的資料 (如空位不敷應用，請另用附頁)								
Items No. 項目編號	UN No. / HK No. 聯合國編號 香港編號	Proper Shipping Name (Please provide description of relevant dangerous goods on existing licence) (請提供危險貨物名稱及相關資料)	Classification 類別	Subsidiary Hazard (if any) 次要危險 (如有)	Packing Group (if any) 包裝組別 (如有)	Compatibility Group (CG) and Compatibility Rule (CR) ^ 相容組別和相容規則 ^ (if any 如有)	Maximum Quantity# for Storage and Use in Aggregate 總共貯存和使用的最多分量# *Delete as appropriate 刪 除不適用者	Storage in Tank 貯存於槽
1	H301	DIESEL OIL (Diesel)	3A	N.A.	III	N.A.	3000 L/kg ⁺	☐
2							L/kg ⁺	☐
3							L/kg ⁺	☐
4							L/kg ⁺	☐
5							L/kg ⁺	☐
6							L/kg ⁺	☐
7							L/kg ⁺	☐
8							L/kg ⁺	☐
9							L/kg ⁺	☐
10							L/kg ⁺	☐


Use Area

Purpose of using DG

Particulars of DG


可掃描此QR Code搜尋更多危險品類別及其他資料

Use Area

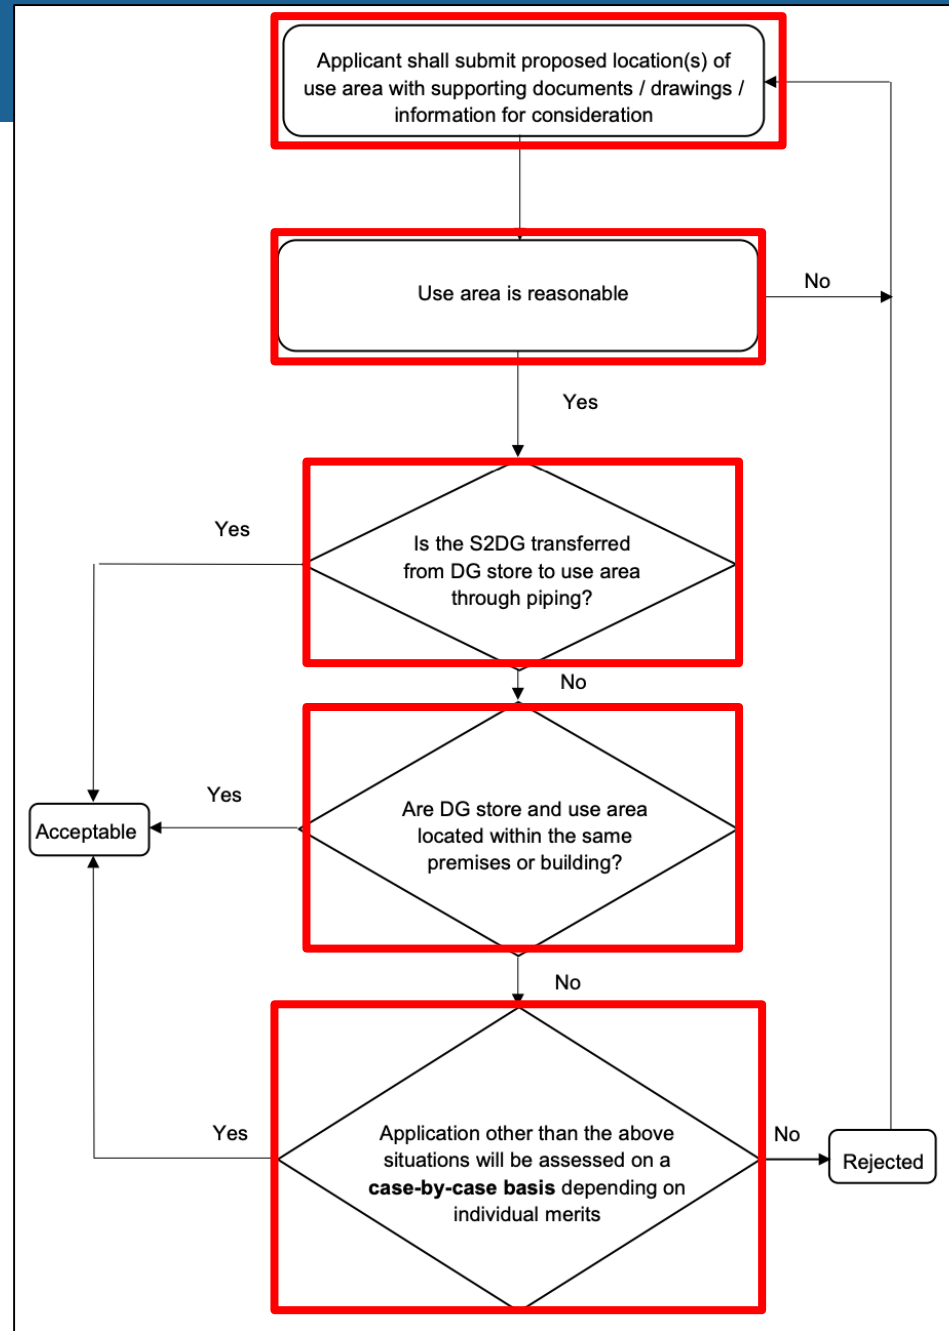


Sample 1 – Proposed Use Area

[Clarification is required]

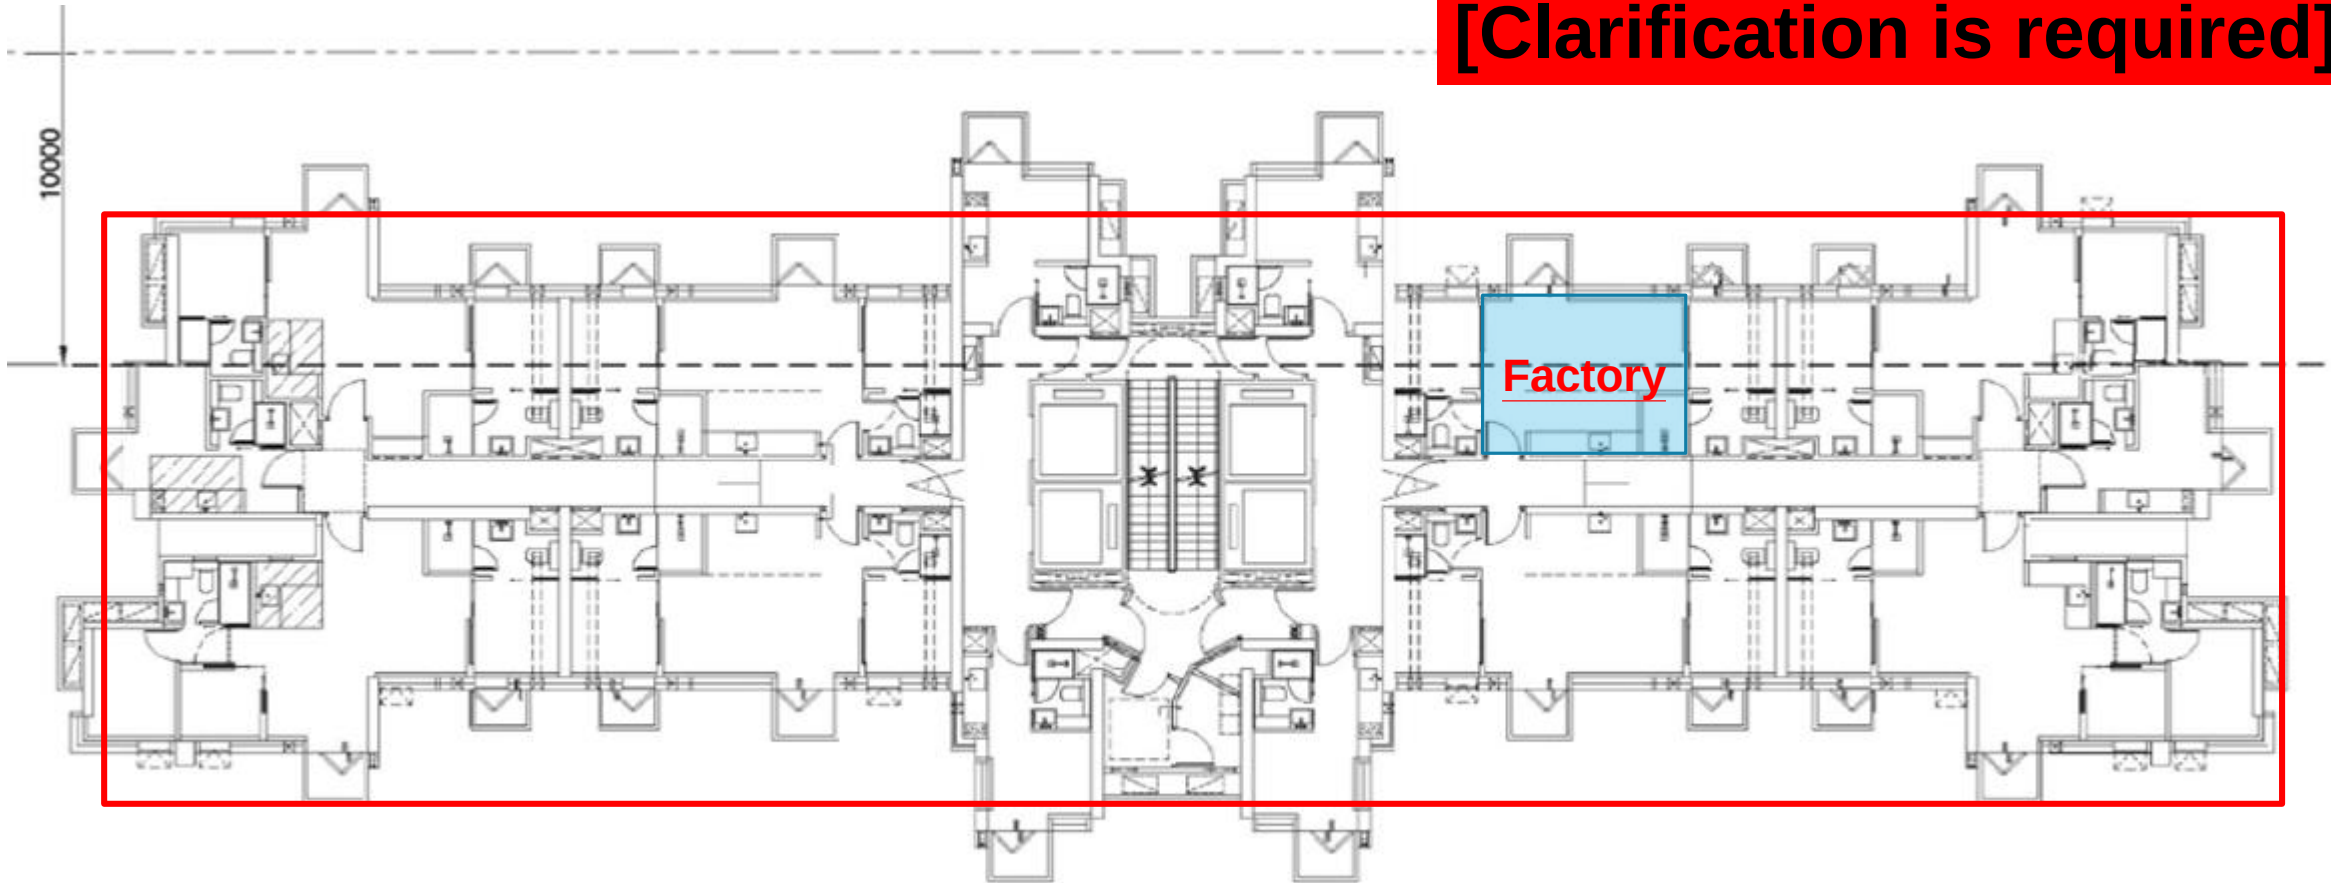

新界荃灣ABC路ABC工業大廈 3座10樓

Sample 2 – Proposed Use Area

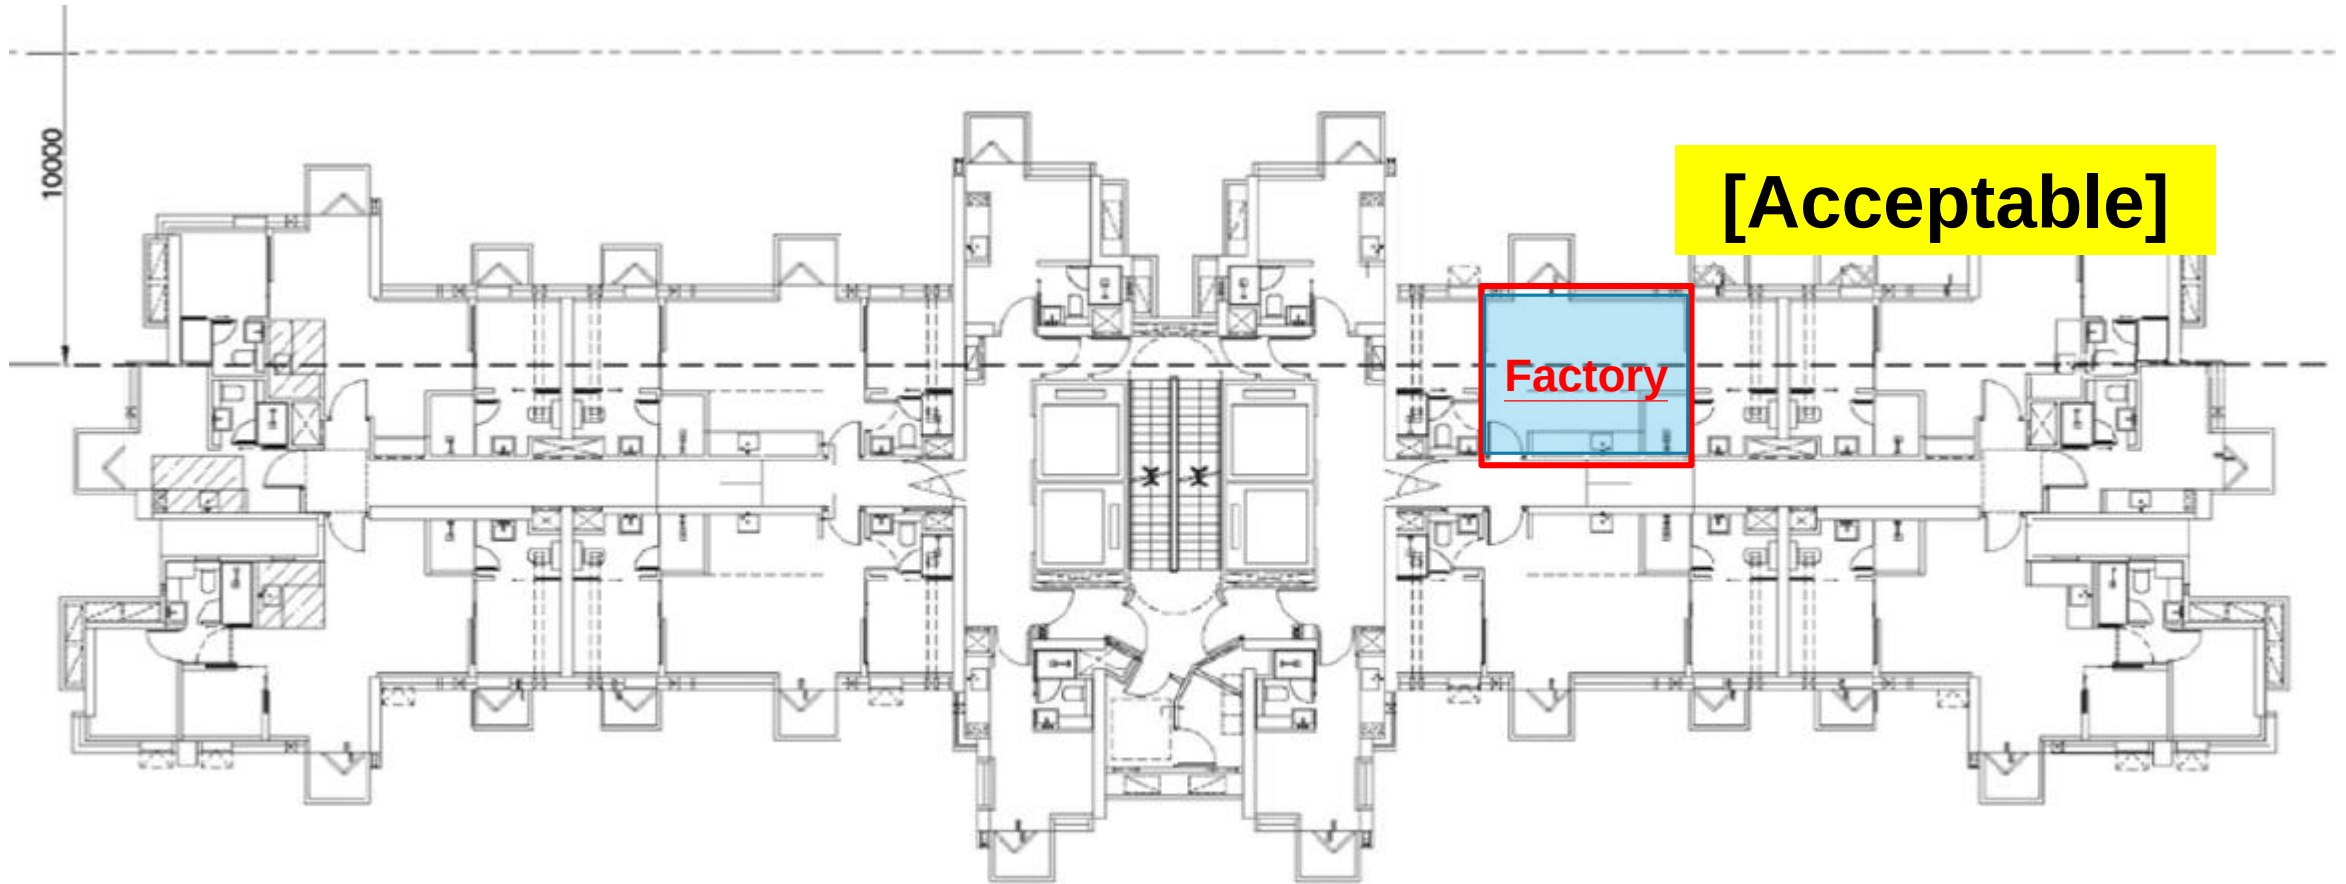

新界荃灣ABC路ABC工業大廈 3座10樓

Application form - **Particulars of DG**

14. Transport information

DOT

UN-No
Proper Shipping Name
Hazard Class
Packing Group

UN2214
PHTHALIC ANHYDRIDE
8
III

- TDG

UN-No
Proper Shipping Name
Hazard Class
Packing Group

UN2214
PHTHALIC ANHYDRIDE
8
III

IATA

UN-No
Proper Shipping Name
Hazard Class
Packing Group

UN2214
PHTHALIC ANHYDRIDE
8
III

IMDG/IMO

UN-No
Proper Shipping Name
Hazard Class
Packing Group


UN2214
PHTHALIC ANHYDRIDE
8
III

2214

-Class-
-Subsidiary Hazard-
-Maximum Package Size-
-Compatibility-

Search


UN No. / HK No.	Proper Shipping Name / Packing Group (if any)	Class	Subsidiary Hazard	Maximum Package Size	Compatibility
2214	PHTHALIC ANHYDRIDE / PG III	8	None	None	CG1, CR6, CR19

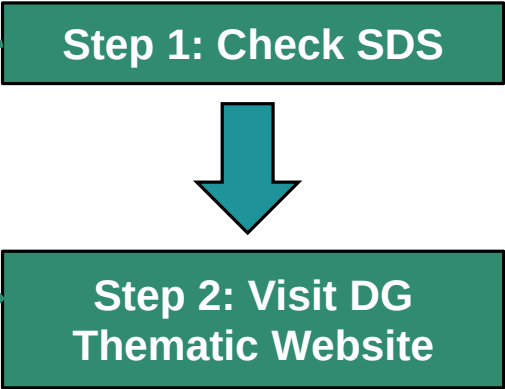

Application form - Particulars of DG

Part 5: Particulars of S2DG (please attach supplementary sheet(s) if space provided is insufficient)
第五部份：附表 2 危險品的資料 (如空位不敷應用，請另用附頁)

Items No. 項目編號	UN No. / HK No. 聯合國編號 香港編號	Proper Shipping Name + 正式運輸名稱 + (Please provide description of relevant dangerous goods on existing licence) (請提供現有牌照上相關危險品的名稱)	Classification 類別	Subsidiary Hazard (if any 如有) 次要危險性	Packing Group (if any 如有) 包裝類別	Compatibility Group (CG) and Compatibility Rule (CR)^ 相容組別和相容規則^ (if any 如有)	Maximum Quantity# for Storage and Use in Aggregate 總共貯存和使用的最多分量# <i>*Delete as appropriate 刪 除不適用者</i>	Storage in Tank 以貯槽貯存
1	UN 2214	PHthalic anhydride	8	None	III	CG1, CR6, CR19	L / kg*	☐
2							L / kg*	☐
3							L / kg*	☐

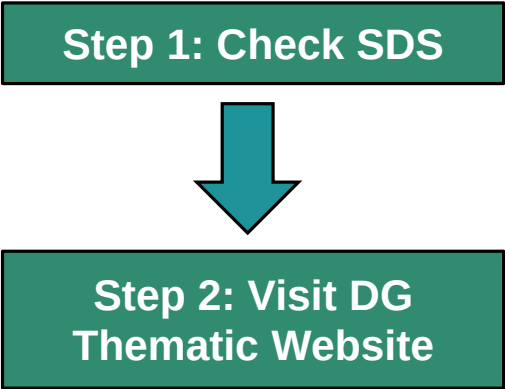

-Class-

-Subsidiary Hazard-

Maximum Package Size-

-Compatibility-

UN No. / HK No.

Proper Shipping Name / Packing Group (if any)

Class

Subsidiary Hazard

Maximum Package Size

Compatibility

2214

PHthalic anhydride / PG III


8

None

None

CG1, CR6, CR19

Application form - Particulars of DG

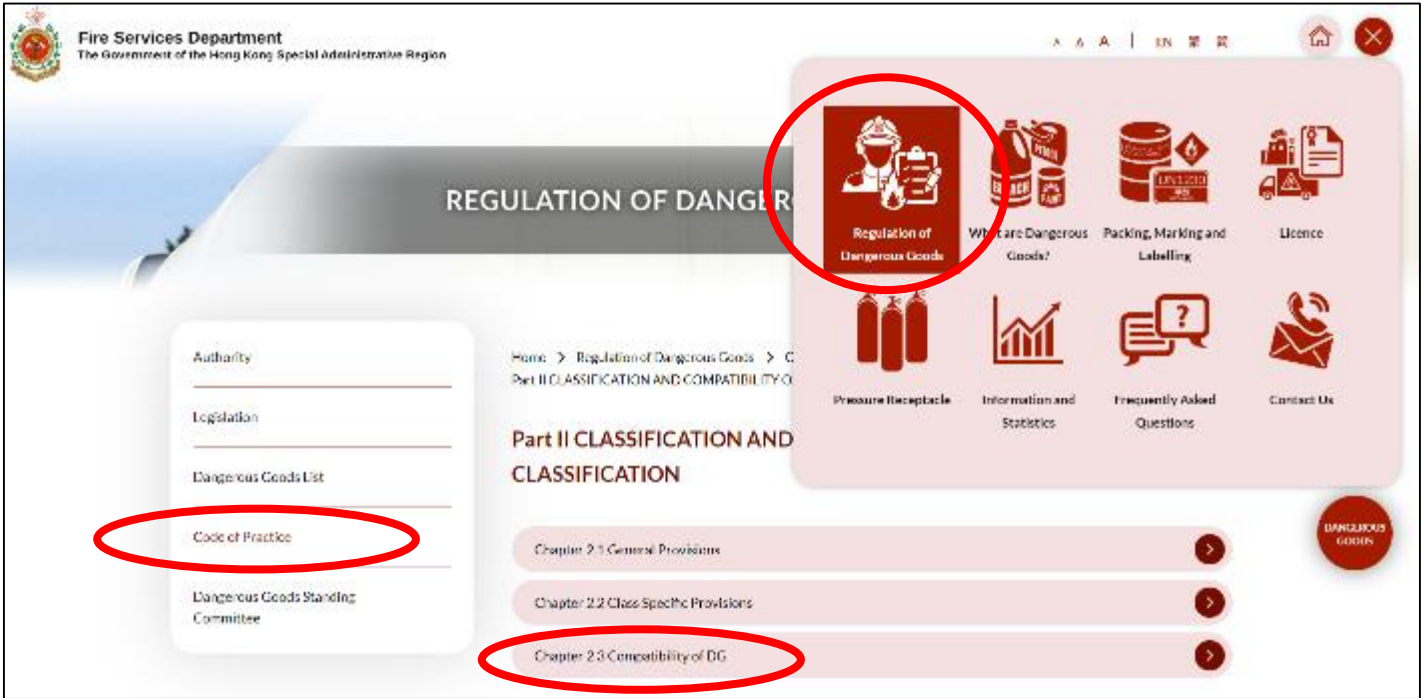

Step 1: Check SDS



Step 2: Visit DG Thematic Website



Step 3: Check Compatibility Table

2.3.3.2.1 Compatibility Table for Class 2.1, 2.2 & 2.3 DG

CLASS	2.1#	2.2#	2.3#
Flammable gases (2.1)	O	O	X
Non-flammable, non-toxic gases (2.2)	O	O	O
Toxic gases (2.3)	X	O	O

O Column 10 of the DG List shall be referred

X Incompatible

Class 2 DG in limited packs are compatible with each other regardless of the table in 2.3.3.2.1 above and their CG & CR

Application form - Particulars of DG



Fire Services Department
The Government of the Hong Kong Special Administrative Region

REGULATION OF DANGEROUS GOODS

Regulation of Dangerous Goods

What are Dangerous Goods?

Packing, Marking and Labelling

Licence

Pressure Receptacle

Information and Statistics

Frequently Asked Questions

Contact Us

Home > Regulation of Dangerous Goods > Part II CLASSIFICATION AND COMPATIBILITY

Part II CLASSIFICATION AND COMPATIBILITY

Chapter 2.1 General Provisions

Chapter 2.2 Class Specific Provisions

Chapter 2.3 Compatibility of DG

Authority

Legislation

Dangerous Goods List

Code of Practice

Dangerous Goods Standing Committee

2.3.3.2.1

Compatibility Table for Class 2.1, 2.2 & 2.3 DG

CLASS	2.1#	2.2#	2.3#
Flammable gases (2.1)	O	O	X
Non-flammable, non-toxic gases (2.2)	O	O	O
Toxic gases (2.3)			

O Column 10 of the DG List shall be referred and Class 2 or 3 DG, which are immiscible²⁷ with water, are incompatible with any such DG, which are miscible with water.

* Only for paint materials that are Class 8 DG.


Class 2 DG in limited packs are compatible with each other regardless of their miscibility and any CG & CR.

CLASS	3#	3A#	8*#
Flammable liquids (3)	O	O	O
Diesel oils, furnace oils and other fuel oils (3A)	O	O	O
Paint materials (8*)	O	O	O


O Column 10 of the DG List shall be referred and Class 3 or 3A DG, which are immiscible²⁷ with water, are incompatible with any such DG, which are miscible with water.

* Only for paint materials that are Class 8 DG.

Class 3, 3A DG in limited packs and paint materials in limited packs are compatible with each other regardless of their miscibility and any CG & CR.

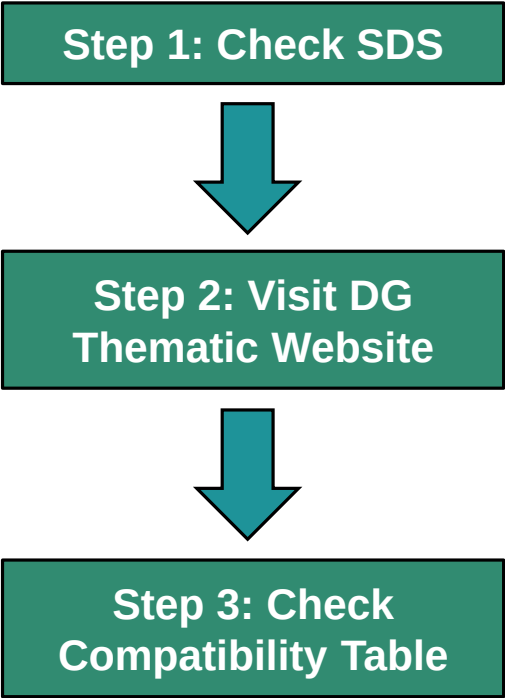

Application form - Particulars of DG

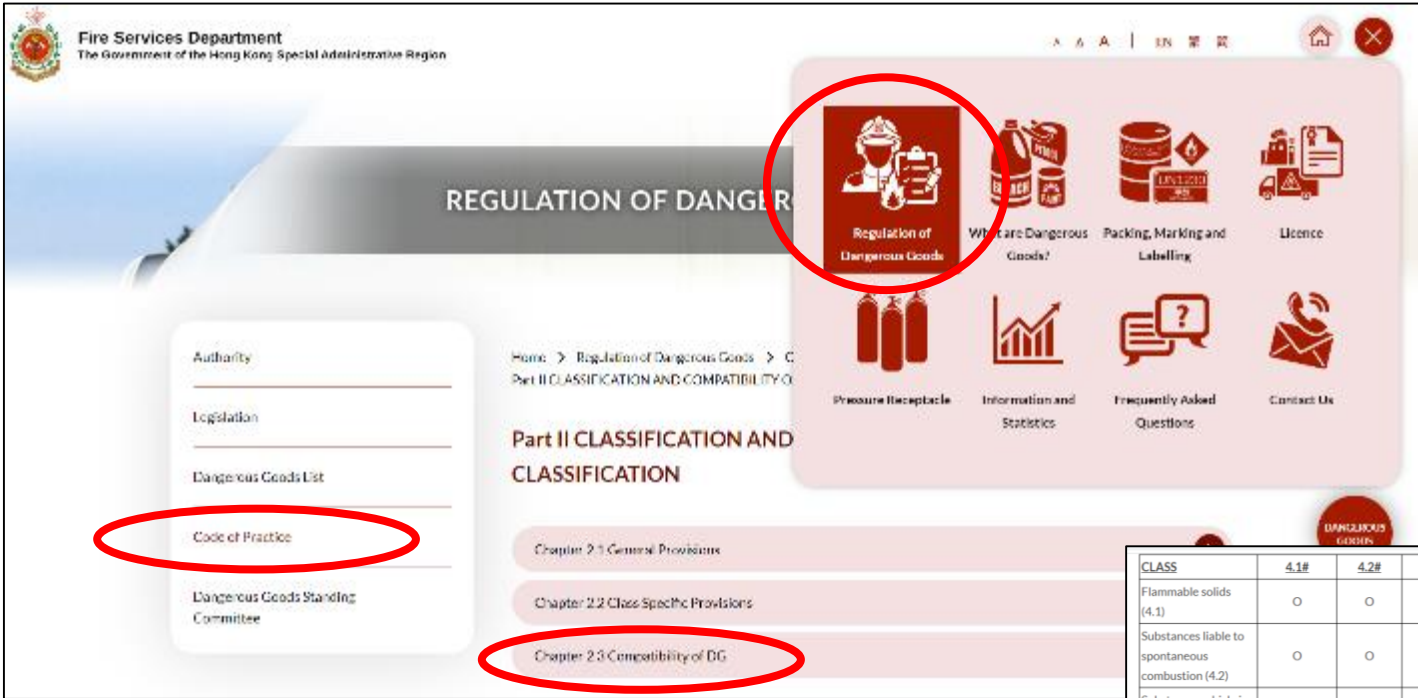

2.3.3.2.1 Compatibility Table for Class 2.1, 2.2 & 2.3 DG

CLASS	2.1#	2.2#	2.3#
Flammable gases (2.1)	O	O	X
Non-flammable, non-toxic gases (2.2)	O	O	O
Toxic gases (2.3)			

CLASS	3#	3A#
Flammable liquids (3)	O	O
Diesel oils, furnace oils and other fuel oils (3A)	O	O
Paint materials (8*)	O	O

O Column 10 of the DG List shall be referred and Class 3 or 3A DG, which are immiscible with water, are incompatible with any such DG, which are miscible with water.
* Only for paint materials that are Class 8 DG.
Class 3, 3A DG in limited packs and paint materials in limited packs are compatible with each other regardless of their miscibility and any CG & CR.

CLASS	4.1#	4.2#	4.3#	5.1#	5.2#	6.1#	8#	9#
Flammable solids (4.1)	O	O	O	O	X	O	O	O
Substances liable to spontaneous combustion (4.2)	O	O	O	X	X	O	O	O
Substances which, in contact with water, emit flammable gases (4.3)	O	O	O	X	X	O	O	O
Oxidizing substances (5.1)	O	X	X	O	X*	O	X	O
Organic peroxides (5.2)	X	X	X	X*	O	O	X	O
Toxic substances (6.1)	O	O	O	O	O	O	O	O
Corrosive substances (8)	O	O	O	X	X	O	O	O
Miscellaneous dangerous substances or materials (9)	O	O	O	O	O	O	O	O

O Column 10 of the DG List shall be referred
X Incompatible
* Class 5.1 or 5.2 DG in table 2.3.3.2.6 below are compatible with each other.
Regardless of the table in 2.3.3.2.5 above and CG & CR of the DG:
(a) Class 4, 5, 6.1, 8 & 9 DG in limited packs are compatible with each other; and
(b) Class 4, 5, 6.1, 8 & 9 DG which comprise the same substance but vary only in their water content are compatible with each other.

Step 1: Check SDS



Step 2: Visit DG Thematic Website



Step 3: Check Compatibility Table

Application form - **Particulars of DG**

Table - List of Compatibility Groups

Compatibility Group	Description
CG1	Acids
CG1a	Strong acids
CG2	Ammonium compounds
CG3	Bromates
CG4	Chlorates
CG5	Chlorites
CG6	Cyanides
CG7	Heavy metals and their salts (including their organometallic compounds)
CG8	Hypochlorites
CG9	Lead and its compounds
CG10	Liquid halogenated hydrocarbons
CG11	Mercury and mercury compounds
CG12	Nitrites and their mixtures
CG13	Perchlorates
CG14	Permanganates
CG15	Powdered metals
CG16	Peroxides
CG17	Azides
CG18	Alkalis
CG19	Oxidizing gases (non-flammable & non-toxic)

Table - List of Compatibility Rules

Compatibility Rule	Description
CR1	For arsenic sulphides, incompatible with CG1 – acids or CG1a – strong acids
CR2	Incompatible with CG1a – strong acids
CR3	Incompatible with Class 5.1 DG
CR4	Incompatible with Class 4.1 DG
CR5	Incompatible with CG1 – acids or CG1a – strong acids
CR6	Incompatible with CG18 – alkalis
CR7	Incompatible with CG19 – oxidizing gases
CR8	Incompatible with CG15 – powdered metals
CR9	Incompatible with ammonia

Step 1: Check SDS



**Step 2: Visit DG
Thematic Website**



**Step 3: Check
Compatibility Table**



**Step 4: Check
Compatibility Group &
Compatibility Rule**

Application form - Section E (Required Documents)

Section E 戊部			
Part 6: Supporting documents 第六部份：證明文件			
The following documents are submitted herewith for application 就此申請夾附下列文件			
	Renewal Application under Cap. 295B/ Cap. 295G 根據第 295B /295G 章 申請續牌	Licence Application under Cap. 295G 根據第 295G 章申請牌照	
		New Applicant 新申請人	Cap. 295B Licensee 第 295B 章 牌照持有人
✧ a copy of the applicant's identity proof – HKID card / Business Registration Certificate 一份申請人的身份證明文件副本 — 香港身份證 / 商業登記證	✓	✓	✓
✧ a copy of the agent's identity proof – HKID card / Business Registration Certificate (applicable to applications submitted by agent) 一份代理人的身份證明文件副本 — 香港身份證 / 商業登記證 (適用於由代理人辦理的申請) *Please fill in Section F *請填寫己部	✓	✓	✓
✧ an authorisation letter from the applicant (applicable to applications submitted by agent) 申請人授權書 (適用於由代理人辦理的申請) *Please fill in Section F *請填寫己部	✓	✓	✓
✧ a copy of a Periodic Test Certificate (Form WR2) 一份定期測試證明書(表格 WR2)副本	✓	-	✓
✧ a copy of a Certificate of Fire Service Installations and Equipment (FS 251) 一份消防裝置及設備證書(FS 251)副本	✓	-	✓
✧ a copy of annual inspection report for test and inspection performed, in respect of tanks or pipelines used for storage of gases, by persons approved by the Fire Services Department 一份消防處認可的人士檢測貯槽 / 氣體管道裝置周年檢驗報告副本	✓	-	✓
✧ a written explanatory statement supplemented with diagram(s), if applicable, demonstrating the way of manufacture of the S2DG 一份有關附表 2 危險品的製造方法陳述書及圖解副本(如適用)	-	✓ Manufacture Licence 製造牌照	✓ Manufacture Licence 製造牌照

✧ a layout plan in A4 size showing location(s) at which the S2DG may be used 一份以 A4 頁面顯示有關附表 2 危險品使用地點的平面圖 *Please refer to Application Guide for details *詳情請參閱申請指南 #Please submit plan if the location is inexplicable as an address #如無法以地址說明，須提交圖則說明	-	✓ Store and Use Licence 貯存暨使用 牌照	✓ Store and Use Licence 貯存暨使用 牌照
✧ 2 sets of drawings showing the hazardous area 兩套顯示危險區的圖則 *Please refer to Application Guide for details *詳情請參閱申請指南	-	✓	✓
✧ 2 sets of the following drawings regarding the proposed factory/store, including but not limited to- a) Block plan b) Floor plan c) Section plan d) Elevation plan 兩套有關工廠/貯存所的圖則，包括但不限於— a) 樓宇平面圖 b) 樓層平面圖 c) 側面圖 d) 立視圖 *Please refer to Application Guide for details *詳情請參閱申請指南 #Submission of plan is required if there is any alteration to the factory/store #如持牌人對工廠/貯存所作出任何更改，須提交相關圖則	✓#	✓	✓#
✧ a copy of relevant Safety Data Sheet(s) 一份化學品安全技術說明書副本	-	✓	✓


Application form - Section E (Required Documents)

Scenario 1

New Application

The image shows the front page of an application form from the Fire Services Department. It includes the department's logo and name in both English and Chinese. The form is titled 'Application for / Renewal of Manufacture Licence for Schedule 2 Dangerous Goods / Store and Use Licence for Schedule 2 Dangerous Goods'. It specifies that the form is only applicable to applications or renewals during a transitional period. The form is divided into several sections, including 'Part 1: Nature of Application' and 'Part 2: Particulars of Applicant'. It contains various checkboxes and fields for providing detailed information about the application.

Application form

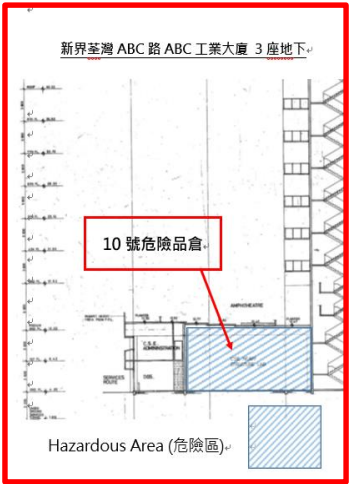

Hazardous Area plans

The image is a Safety Data Sheet (SDS) for a product called 'Flammosol'. It is divided into several sections: '1. IDENTIFICATION', '2. HAZARDOUS IDENTIFICATION', and '3. PRECAUTIONARY STATEMENTS'. The '1. IDENTIFICATION' section includes product name, brand, and CAS No. The '2. HAZARDOUS IDENTIFICATION' section includes hazard statements and pictograms. The '3. PRECAUTIONARY STATEMENTS' section includes precautionary statements and first aid measures. The SDS is written in English and Chinese.


Safety Data Sheet

-BRC / HKID
-BRC of the agent
-Authorization letter for agent

Other documents

Plans of DG Store

Plans of DG Store

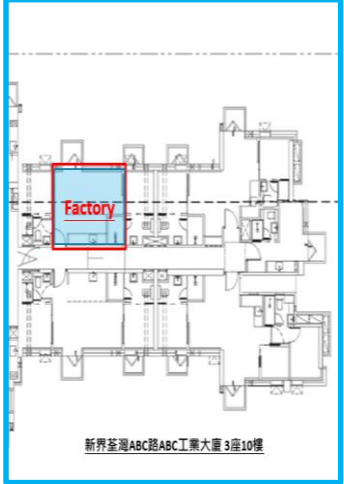

Use area plan (if necessary)


Application form - Section E (Required Documents)

Scenario 2

Application in Progress

The image shows the 'Application for / Renewal of' form for Schedule 2 Dangerous Goods. It includes the Fire Services Department logo and a section for 'Part 1: Nature of Application'. The form is titled 'Application for / Renewal of' and 'Schedule 2 Dangerous Goods'. It includes a section for 'Part 1: Nature of Application' with checkboxes for 'Renewal Application under Dangerous Goods (General) Regulations, Cap. 295B' and 'Renewal Application under Dangerous Goods (Control) Regulations, Cap. 295C'. It also includes a section for 'Part 2: Particulars of Applicant' with fields for 'Name of Applicant', 'Address', 'Telephone Number', and 'Email Address'.

Application form

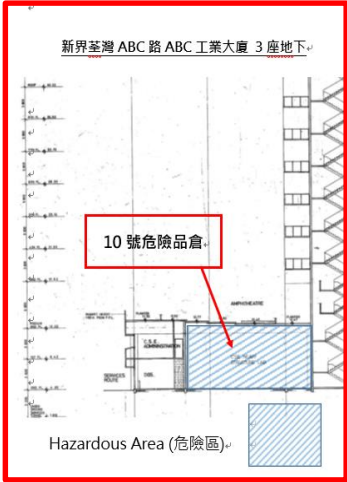


Hazardous Area plans

The image shows a Safety Data Sheet (SDS) for 'Flammosol'. It includes sections for '1. IDENTIFICATION', '2. HAZARD IDENTIFICATION', and '3. PRECAUTIONARY STATEMENTS'. The SDS is titled 'SAFETY DATA SHEET' and 'Flammosol'. It includes a section for '1. IDENTIFICATION' with fields for 'Product Name', 'Product Number', 'Brand', 'Index No.', and 'CAS No.'. It also includes a section for '2. HAZARD IDENTIFICATION' with fields for 'Classification of the substance or mixture' and 'Label elements'. The SDS is titled 'SAFETY DATA SHEET' and 'Flammosol'.

Safety Data Sheet

-BRC / HKID
-BRC of the agent
-Authorization letter for agent

Other documents

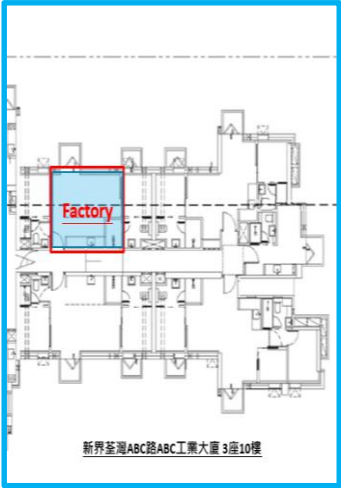

Use area plan (if necessary)

Application form - **Section E (Required Documents)**

Scenario 3

Licensee of Cap. 295B
Application for Cap. 295G Licence

Form for Application for / Renewal of Manufacture Licence for Schedule 2 Dangerous Goods / Store and Use Licence for Schedule 2 Dangerous Goods. The form includes sections for Part 1: Nature of Application and Part 2: Particulars of Applicant. It is titled 'Application for / Renewal of Manufacture Licence for Schedule 2 Dangerous Goods / Store and Use Licence for Schedule 2 Dangerous Goods'.

Application form



Hazardous Area plans

Safety Data Sheet (SDS) for Flammosol. The document includes sections for Identification, Hazards Identification, and Precautionary Statements. It is titled 'SAFETY DATA SHEET Flammosol'.


Safety Data Sheet

-BRC / HKID
-BRC of the agent
-Authorization letter for agent

Other documents

-WR2
-FS251
-Pipe cert. (if required)

Renewal Documents

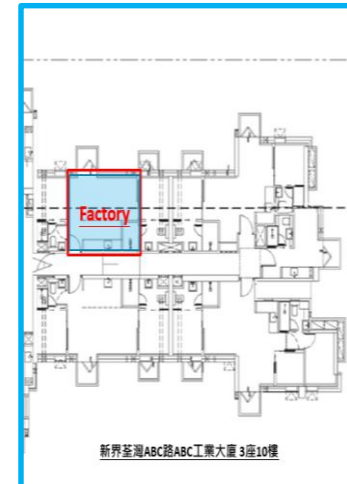

Use area plan (if necessary)


Application form - Hazardous Area Plans



申請危險品牌照及批准指南

(適用於第 2 至第 9A 類危險品，
不包括受香港法例第 51 章《氣體安全條例》
管制的石油氣及其他氣體)

消防處
08/2022


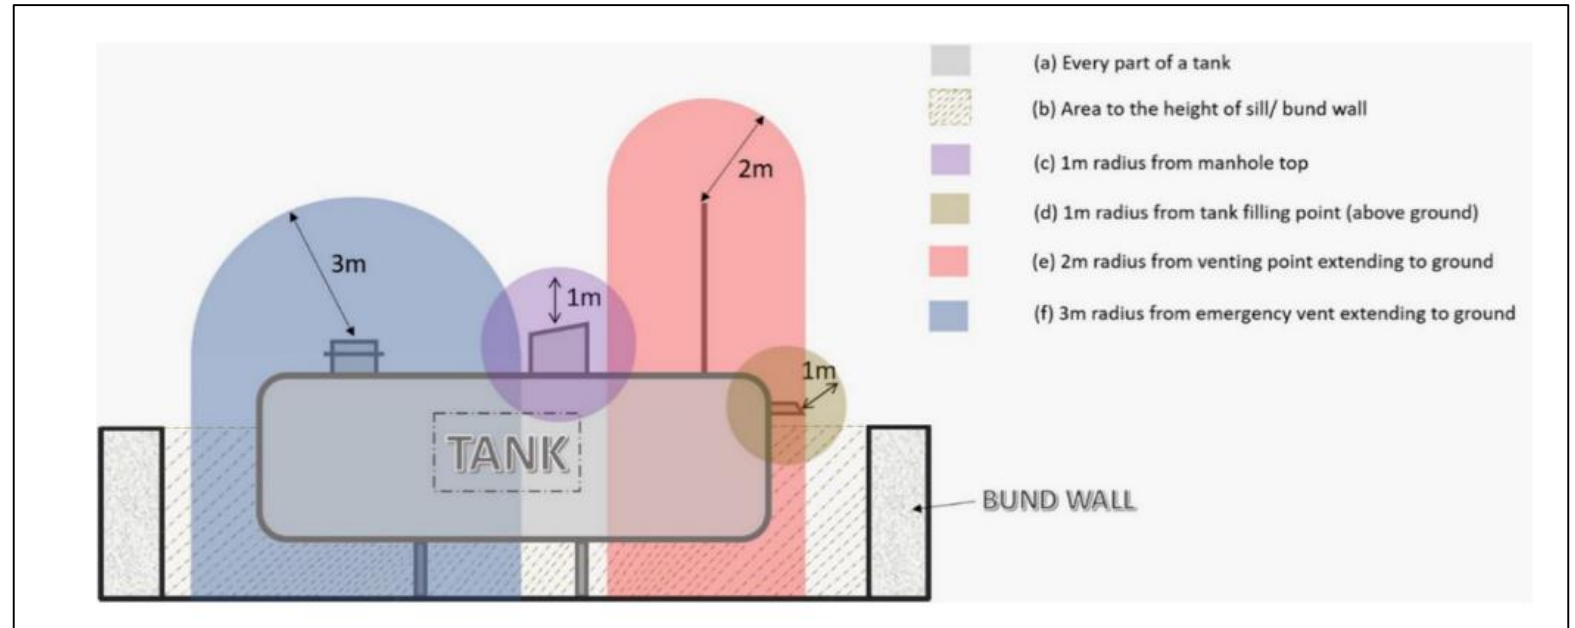


- 2 sets of plan including **layout plan and elevation plan** indicating hazardous area.
- Electrical apparatus installed within hazardous area should meet the standard as specified in the FSRs.

Layout plan



Sample 2 – Fuel Tank Room

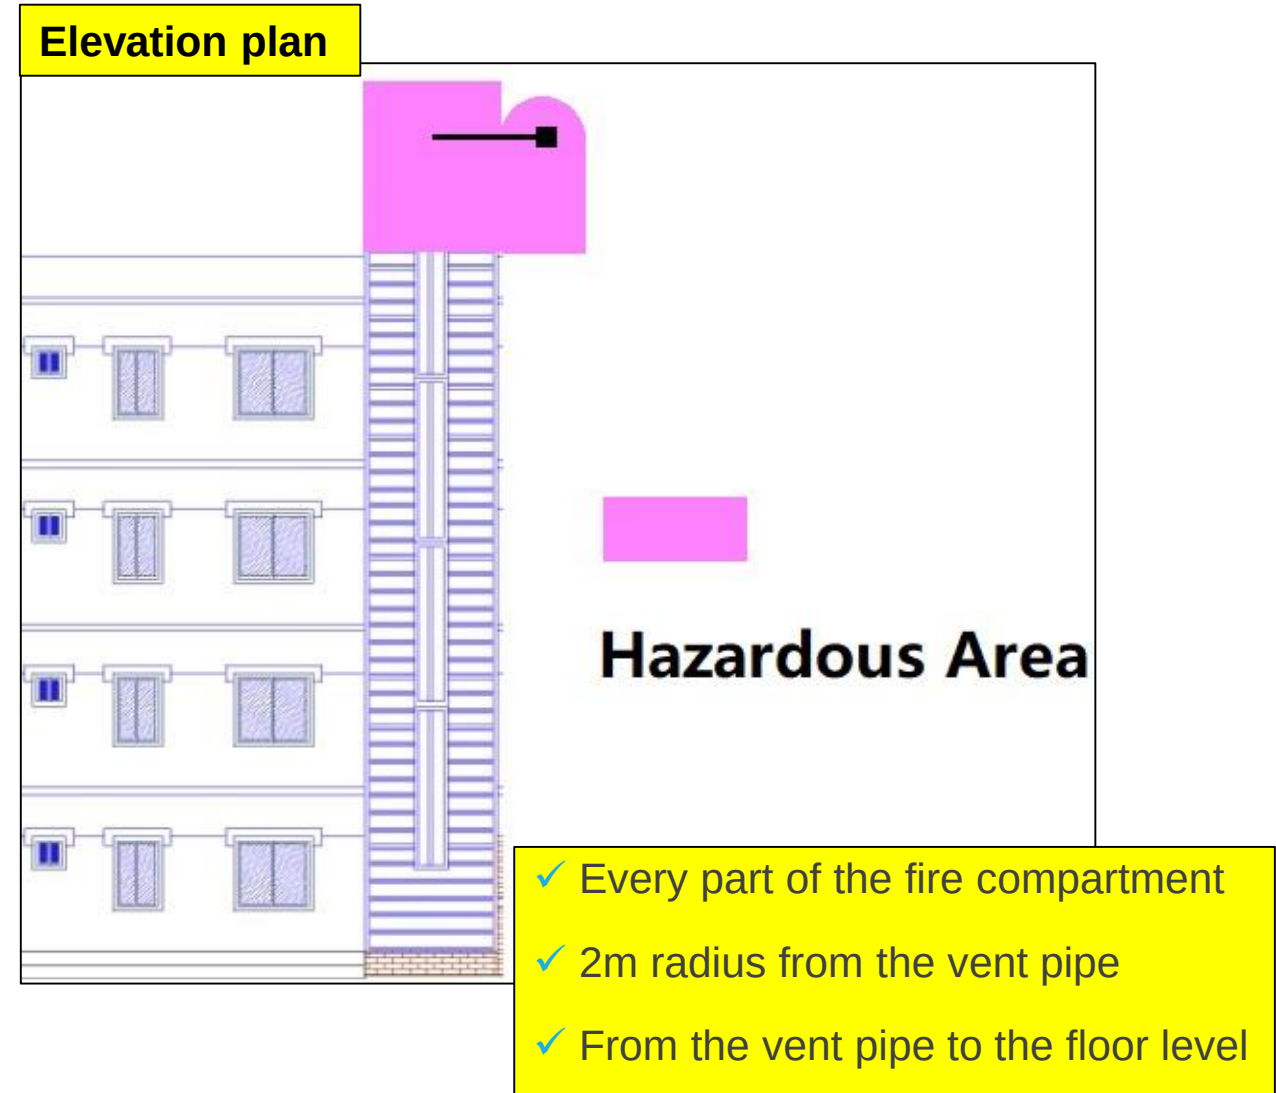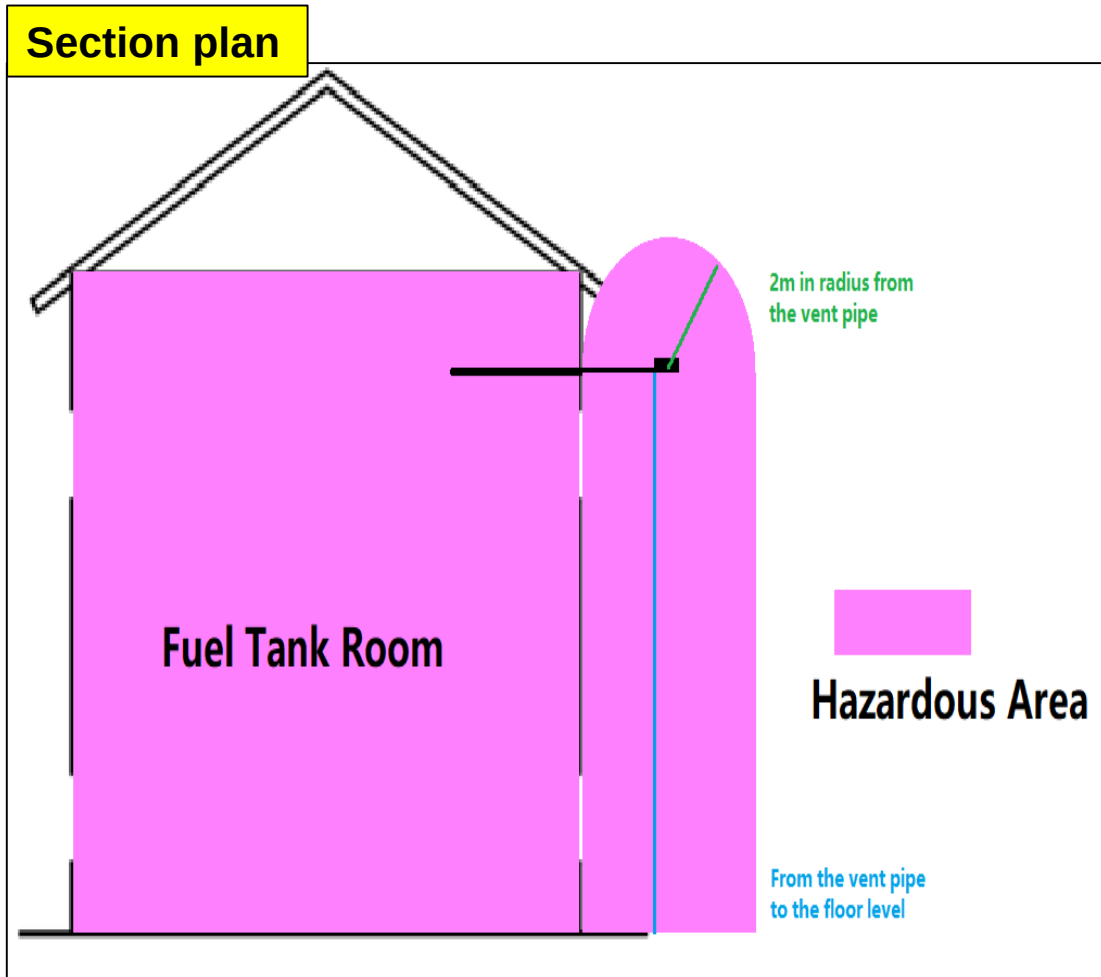

Application form - Section F and G

✧ a layout plan in A4 size showing location(s) at which the S2DG may be used 一份以 A4 頁面顯示有關附表 2 危險品使用地點的平面圖 *Please refer to Application Guide for details *詳情請參閱申請指南 #Please submit plan if the location is inexplicable as an address #如無法以地址說明，須提交圖則說明	-	✓ Store and Use Licence 貯存暨使用牌照	✓ Store and Use Licence 貯存暨使用牌照
✧ 2 sets of drawings showing the hazardous area 兩套顯示危險區的圖則 *Please refer to Application Guide for details *詳情請參閱申請指南	-	✓	✓
✧ 2 sets of the following drawings regarding the proposed factory/store, including but not limited to- a) Block plan b) Floor plan c) Section plan d) Elevation plan 兩套有關工廠/貯存所的圖則，包括但不限於— a) 樓宇平面圖 b) 樓層平面圖 c) 側面圖 d) 立視圖 *Please refer to Application Guide for details *詳情請參閱申請指南 #Submission of plan is required if there is any alteration to the factory/store #如持牌人對工廠/貯存所作出任何更改，須提交相關圖則	✓#	✓	✓#
✧ a copy of relevant Safety Data Sheet(s) 一份化學品安全技術說明書副本	-	✓	✓

Section F 己部			
Part 7: Particulars of Agent of Applicant (if applicable) 第七部份：申請人的代理人資料 (如適用)			
Name of Agent 代理人名稱	(English) (中文)		
Office Telephone & Mobile Phone No. 辦公室及手提電話號碼	(Office) (Mobile)	Fax No. 傳真號碼	
If the agent is a company, please provide the Business Registration Certificate No. 如代辦人為公司，請提供代辦公司的商業登記證號碼	Business Registration Certificate No. (if any) 商業登記證號碼 (如有)		
If the agent is an individual, please provide his / her HKID Card No. 如代辦人為個人，請提供代辦人的身份證號碼	HKID Card No. (if applicable) 身份證號碼 (如適用)		

Section G 庚部 (For Renewal Only) (只適用於續牌)		
Part 8: Declaration 第八部份：聲明		
I / We / My company* DECLARE that 我 / 我們 / 我公司* 謹此聲明 (a)* there is / are NO alteration(s) to the store/factory after the grant or the last renewal of the licence(s) to which this application relates. 本危險品貯存所/工廠自發牌或最近一次續牌至今沒有任何改建。 (b)* there was / were alteration(s) to the store/factory after the grant or the last renewal of the licence(s) to which this application relates, and permission from the Fire Services Department has 本危險品貯存所/工廠自發牌或最近一次續牌後曾經作出改建，而消防處 (i)* not been granted. 未曾予批准。 (ii)* been granted via the following instruments (please quote FSD file reference) 已發出下述文件予以批准 (請提供消防處檔案編號) _____ * Delete as appropriate 刪除不適用者		
(Name 姓名: )	XX	1.3.2022
Signature of Applicant 申請人簽署	Company Chop 公司印鑑	Date 日期
Means of Application Submission 遞交申請方式		
Please return the duly completed application form and supporting documents by any of the following methods: 請將填妥的申請表及證明文件以下列方式遞交： By post / in person 郵寄 / 親身遞交 4/F, Fire Services Department Kwai Chung Office Building, 86 Hing Shing Road, Kwai Chung, New Territories 新界葵涌興盛路 86 號 消防處葵涌辦公大樓 4 樓 危險品課		
Enquiries 查詢		
For further enquiries about licence application, please contact us by the following means: 如欲查詢牌照申請事宜，可透過以下途徑與我們聯絡： Tel No. 電話：2417 5757 Email 電郵：fsdgd@hkfsd.gov.hk		
Remarks: 備註： The personal data furnished in this application form will be used for the sole purpose of handling the application. You have a right to request access to and correction of the personal data in accordance with sections 18 and 22 and Principle 6 of Schedule 1 of the Personal Data (Privacy) Ordinance (Cap. 486). Any falsification of information may result in refusal to the application by the Director of Fire Services. 所提供的個人資料將只會用作處理本申請之用，你有權根據《個人資料(私隱)條例》(第 486 章)第 18 條、第 22 條及附表 1 第 6 原則的規定，查閱及改正個人資料。任何虛假資料可導致消防處處長拒絕有關申請。		

Endorsement by the applicant

Information of Agent (if needed)

Step 2 - Issuance of FSRs and Addendum

FSRs

Scenario 1

New Application



**FIRE SAFETY REQUIREMENTS FOR
DANGEROUS GOODS STORE**
危險品貯存所的消防安全規定

Issue date 發出日期: XXXX		FSD Ref 消防處編號: XXXX	
Address of the store: XXX Industrial Building, Tuen Mun, N.T.			
貯存所的地址:			
Storage location: DC Store inside Unit A, 2/F			
貯存所座落位置:			
Dangerous goods to be stored: 擬貯存的危險品	UN no. / UN XXXX	PSN / Packing Group, if any, (Class) (Subsidiary XXXX	Quantity in tank XX L No
	Total		XX units

DESIGN and CONSTRUCTION
設計及建造

1. The dangerous goods store constructed of fire resisting materials throughout shall be provided in accordance with the latest plans approved in writing by the Director of Fire Services.
須依照消防處處長書面批准的最新圖則設置全部以耐火物料建造的危險品貯存所。
2. The actual layout of the store, including the piping, fittings or equipment designed and constructed for the distribution of dangerous goods from the store (if applicable) shall be in accordance with the latest plans approved in writing by the Director of Fire Services.
貯存所的實際布局，包括為輸送危險品而設計和建造的固定管道、裝置或設備（如有的話），須符合消防處處長書面批准的最新圖則。
3. Door opening(s) of the store shall be fitted with self-closing door(s) having a fire resistance rating of not less than one hour and being capable to be opened in the direction of egress.
貯存所須設有不少於 1 小時耐火時效並向外開啟的自掩門。
4. Locking device shall be provided to the door(s) of the store to prevent unauthorized intrusions when not being attended.
貯存所須設置鎖門裝置，以防止無人工作時被未經授權闖入。

Addendum

Addendum to Fire Safety Requirements

This Addendum is issued for adding the following clauses into the Fire Safety Requirements issued on XX.XX.19XX ("the Fire Safety Requirements") in respect of the Licence with Licence No. XXXXXX for the purpose of granting a new licence in accordance with the Dangerous Goods (Control) Regulation, Cap. 295G.

Clause (1) – Validity of the Fire Safety Requirements

- 1.1 *The Fire Safety Requirements shall remain in force except amendments as stipulated in clauses (2) to (3) below to be made.*
- 1.2 *The granting of a new licence in accordance with the Dangerous Goods (Control) Regulation, Cap. 295G is subject to the compliance with the Fire Safety Requirements including the compliance with the amendment as stipulated in clauses (2) to (3).*

Clause (2) – Heading and Particulars, etc. of the Fire Safety Requirements

- 2.1 *Heading of the Fire Safety Requirements is replaced by:*

FIRE SAFETY REQUIREMENTS FOR DANGEROUS GOODS STORE
危險品貯存所的消防安全規定

- 2.2 Particulars on the Fire Safety Requirements indicating the storage content and location, if any, are replaced by:

Issue date 發出日期:	XXXX	FSD Ref 消防處檔號:	XXXX
Address of the store:	XXXX Industrial Building, Tuen Mun, N.T.		
貯存所的地址:			
Storage location:	DG Store inside Unit A, 2/F		
貯存所座落位置:			
Dangerous goods to be stored: 擬貯存的危險品	UN no. / HK no.	PSN / Packing Group, if any, (Class) (Subsidiary Hazard)	Quantity (Y)
	UN XXXX	XXXX	XX L
	Total		XX units

Scenario 2

Application in Progress

Scenario 3

Licensee of Cap. 295B
Application for Cap. 295G
Licence

Step 2 - Issuance of FSRs and Addendum

**OPERATION, HOUSEKEEPING, MANAGEMENT, SECURITY,
STAFF TRAINING and EMERGENCY PREPAREDNESS**
運作、整理、管理、保安、員工培訓及緊急情況的應變準備等

23. The licensee shall confirm in writing the receipt of the approved plans and the set of fire safety requirements issued by the Director of Fire Services for every application for new construction or alteration. (this requirement is only applicable to application(s) submitted by agents.)

持牌人須書面確認已收到由消防處處長就每宗新建或改建申請而發出的批准圖則及/或消防安全規定。(此規定只適用於經代理人的申請。)

24. An operation manual containing procedures in respect of the operation, housekeeping, management, security, emergency preparedness of the licensed store shall be provided for training and guidance to all operators of the store. The manual shall be stowed in a suitable place readily available for inspection upon demand, and the procedures contained in the manual shall **at least** include the following scopes:

持牌人須提供一份操作手冊，說明有關該持牌貯存所的運作、整理、管理、保安、緊急情況的應變準備等事宜的程序，用以訓練所有操作人員，並給予他們指引。持牌人須將手冊存放在一個遭索閱時可供隨時檢查的適當位置，而該等程序須**最少**涵蓋以下範圍：

- 24.1 The operators shall only store in the licensed store, dangerous goods of the types and of the quantity not exceeding those specified in the licence. Storage of dangerous goods which are specified as incompatible in the code of practice is prohibited.

操作人員只准在持牌貯存所貯存與牌照指明的種類相同及不超過指明數量的危險品，並且不得貯存工作守則指明為互不相容的危險品。

- 24.2 The operators shall ensure that the dangerous goods are only used in the location(s) specified in the licence, and returned to the store when they are not in use.

操作人員須確保倉貯危險品於牌照指明的地點使用，並於不使用時送回貯存所貯存。

Operation Manual

- ✓ At least include the scopes in FSRs
- ✓ Stowed in a suitable place readily available to all operators

Step 2 - Issuance of FSRs and Addendum


Licence under Cap. 295B



Licence under Cap. 295G



Step 3 - Report of completion

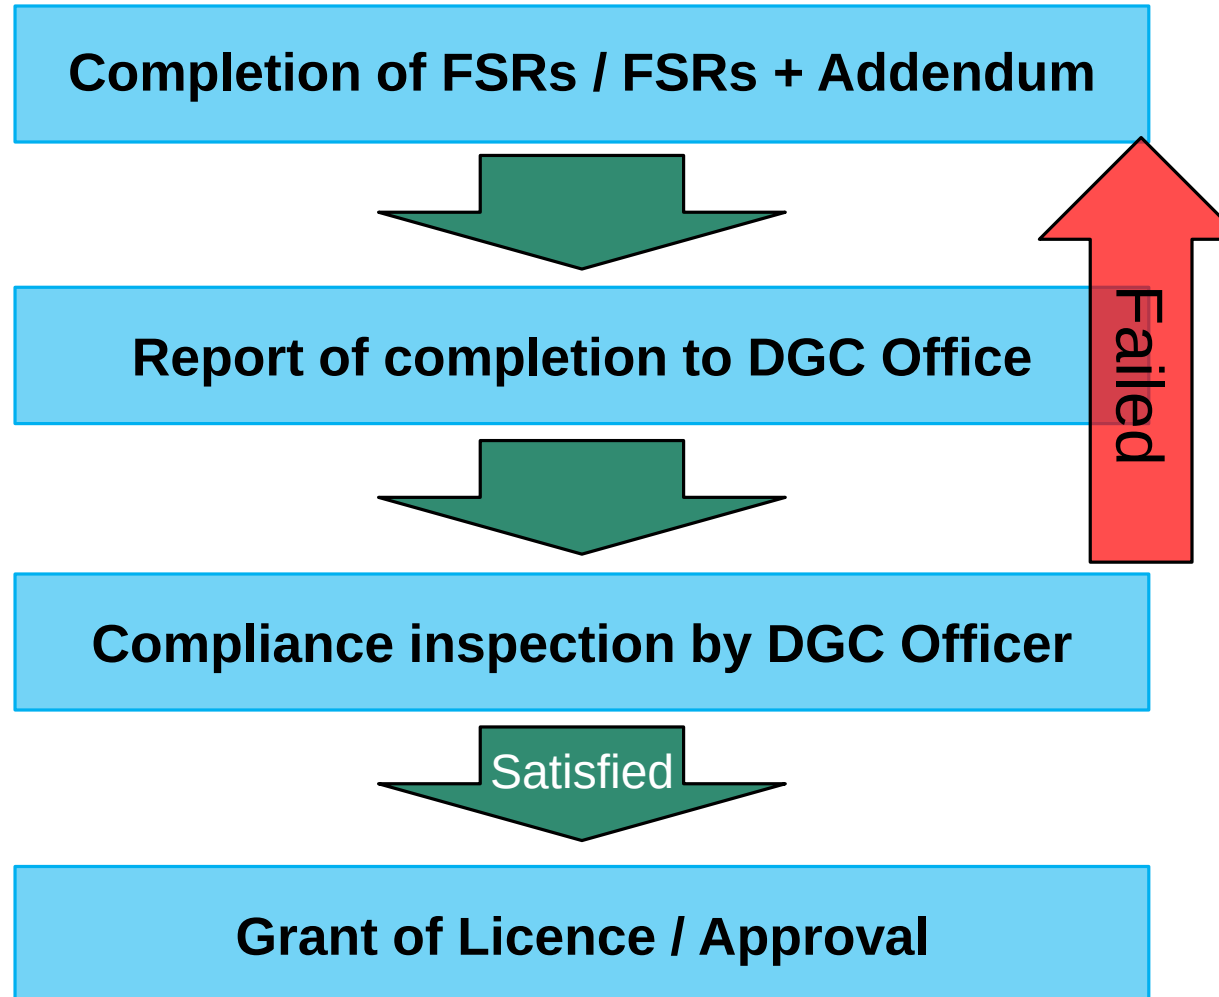

Summary

	<u>Scenario 1</u>	<u>Scenario 2</u>	<u>Scenario 3</u>
	New Application	Application in Progress	Licensee of Cap. 295B Application for Cap. 295G Licence
<u>Step 1</u> Submission	-Application form -2 sets of Hazardous area plan -Safety data sheet -Other documents -2 sets of drawing of DG Store	-Application form -2 sets of Hazardous area plan -Safety data sheet -Other documents	-Application form -2 sets of Hazardous area plan -Safety data sheet -Other documents
<u>Step 2</u> Issue of FSRs / Addendum	-FSRs issued -Stamped drawings of DG Store -Stamped hazardous area plan	-Addendum issued -Stamped hazardous area plan	-Addendum issued -Stamped hazardous area plan
<u>Step 3</u> Report of completion	-Completion of FSRs -Report of completion	-Completion of FSRs + Addendum -Report of completion	-Completion of FSRs + Addendum -Report of completion
<u>Issuance of Licence / Approval under Cap. 295G</u>			



消防處

Fire Services Department

Thank You!





消防處

Fire Services Department

How to Apply for Conveyance Licence

Senior Station Officer

YEUNG Ka-wai, Kevin

Dangerous Goods Enforcement Division

Licensing and Certification Command

Fire Services Department

Table of Contents

- ◆ **Introduction**
- ◆ **New Application under Cap. 295G**
- ◆ **New Fire Safety Requirements under Cap. 295G**
- ◆ **Renewal under Cap. 295B and Cap. 295G**
- ◆ **Online Booking System**



Conveyance Licence

- The amended Dangerous Goods Ordinance and its subsidiary legislation has come into effect on 31 March 2022
- Conveyance Licence is required for conveying Class 2/3/3A DG on land except under the exempt quantity
- Fire Safety Requirements



Conveyance Licence

Format of Licence and Identification Disc

牌照編號 Licence No.

**THE GOVERNMENT OF THE HONG KONG
SPECIAL ADMINISTRATIVE REGION**
香港特別行政區政府
Dangerous Goods Ordinance
Chapter 295, Section 6 and Section 9
危險品條例
第二百九十五章第六條及第九條
CONVEYANCE LICENCE FOR SCHEDULE 2 DANGEROUS GOODS (S2DG) (Class 2/3/3A)
S2 危險品(第 2/3/3A 類)運送牌照

1. Name of the licensee
持牌人的姓名或名稱.....
2. 獲准以有關持牌車輛運送的 S2 危險品(第 2/3/3A 類)的類別劃分

The classification of S2DG (Class 2/3/3A) permitted to be conveyed by the licensed vehicle
Class or type
類別或種類.....
3. Vehicle Registration Mark
車輛登記號碼.....
4. Engine No. Chassis No.
引擎號碼..... 底盤號碼.....
5. Prescribed fee for the licence
牌照的訂明費用.....
6. Date on which the licence is first granted
首次批給牌照的日期.....
7. Validity period of the licence
牌照的有效期.....
8. The area in which S2DG (Class 2/3/3A) may be conveyed by the licensed vehicle
可在哪個範圍內以該持牌車輛運送 S2 危險品(第 2/3/3A 類).....
9. This licence is subject to the endorsed conditions overleaf
本牌照受後頁已批註的條件所規限 -

()
for Director of Fire Services
消防處處長
(代行)

香港法例第二百九十五章危險品條例
Dangerous Goods Ordinance Chapter 295, Laws of Hong Kong

2
消防處
Fire Services Department
識別證
Identification Disc
第二類
氣體
Class 2 Gases

Licence Number
牌照編號..... V000001234
Vehicle Registration Mark
車輛登記號碼..... AB1234
Validity period
有效期..... 01/05/2022 - 30/04/2023

F.S. 270 (Rev. 4 (2022))

香港法例第二百九十五章危險品條例
Dangerous Goods Ordinance Chapter 295, Laws of Hong Kong

3 / 3A
消防處
Fire Services Department
識別證
Identification Disc
第三類 / 三 A 類
易燃液體
Class 3 / 3A Flammable Liquids

Licence Number
牌照編號..... V000001234
Vehicle Registration Mark
車輛登記號碼..... AB1234
Validity period
有效期..... 01/05/2022 - 30/04/2023

F.S. 271 (Rev. 4 (2022))



4 Major Differences

□ Classification

- Category 2 → Class 2
- Category 5 → Class 3/3A

□ Terminology




- Tank Wagon 油缸車 → Tank Vehicle 貯槽車輛
- Tank Wagon 拖缸車 → Trailer with tank 貯槽拖車
- Panel Van 密封式小型貨車 → Pantechicon 廂式貨車

□ Signs (Warning Sign, Placard, Plate and Notice)

□ Provision of Operation Manual



Warning Sign, Placard, Plate and Notice

Description	Location for Display
Warning Sign (警告標誌) 	Front and Rear of the vehicle
Placard (標示牌) 	Both sides and Rear of the vehicle
HAZCHEM Code Plate (代號牌) (single-load) (e.g. UN 1203 Petrol) 	Both sides and Rear of the vehicle
HAZCHEM Code Plate (代號牌) (multi-load) 	
Identification Plate (識別牌) 	Both sides of each tank compartment of the vehicle
“NO SMOKING 不准吸煙” Notices (告示牌) 	(i) Both sides of the vehicle; and (ii) A portable notice
Other Notices (其他告示牌) 	as specified in the FSRs



Warning Sign, Placard, Plate and Notice

2
2




Warning Sign at
front and rear



Placard at rear

HAZCHEM code
plate (multi-load)
at rear

HAZCHEM code
plate (multi-load) at
both sides

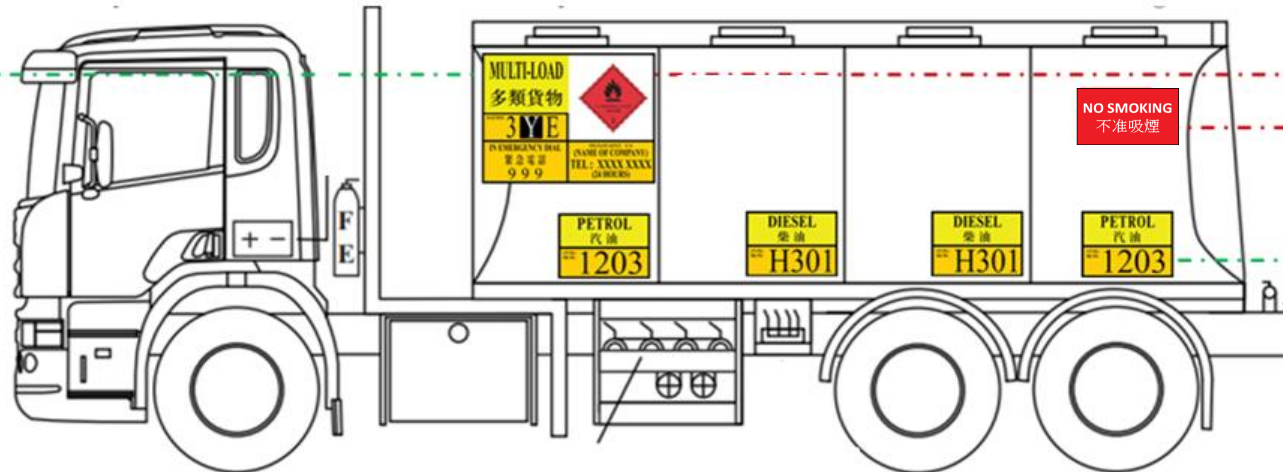

Placard at both sides

“NO SMOKING
不准吸煙” notice
at both sides

Identification
Plates at the
exterior on
both sides of
each tank
compartment



Warning Sign, Placard, Plate and Notice



Warning Sign, Placard, Plate and Notice




Warning Sign, Placard, Plate and Notice



"Keep Closed and Locked" Notice
for every Fuel Tank Lid
油蓋“保持緊閉及上鎖”告示



Warning Sign, Placard, Plate and Notice

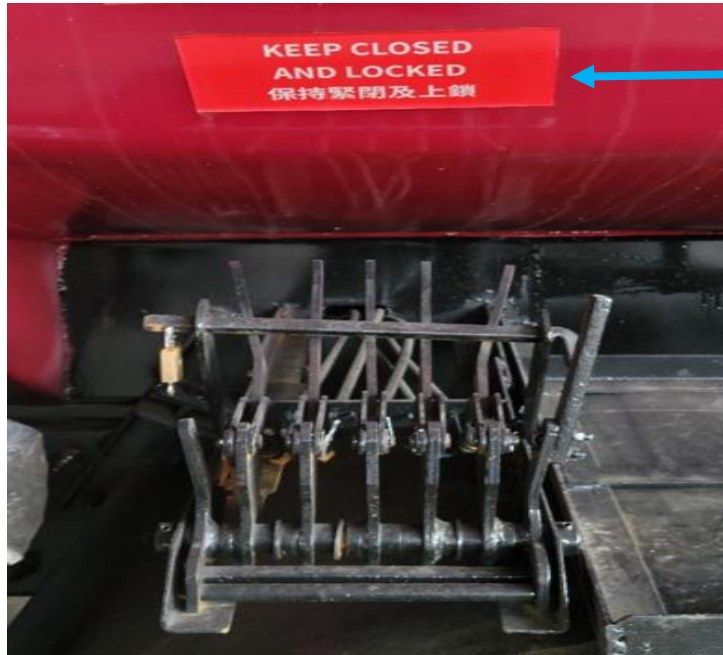

“Keep Closed and Locked” Notice
for built-in type shut-off valves
內置式快速關斷閥“保持緊閉及上鎖”告示



“Keep Closed” Notice
for filling pipes and discharging pipes
放油管及入油管“保持緊閉”告示

Warning Sign, Placard, Plate and Notice



Provision of Operation Manual

- Available and readily accessible to the driver(s)/operator(s)
- Driver(s)/operator(s) shall be conversant with
- Mandatory issue(s) mentioned in the Fire Safety Requirements issued
- Safety Data Sheet (SDS) should be included

**OPERATION, HOUSEKEEPING, MANAGEMENT, SECURITY,
STAFF TRAINING and EMERGENCY PREPAREDNESS**
運作、整潔、管理、保安、員工培訓及緊急情況的應變準備

38. An operation manual containing procedures in respect of the operation, housekeeping, management, security, emergency preparedness of the licensed vehicle shall be provided for training and guidance to the driver and all operators. The manual shall be stored in the driver's cab at all times and the procedures shall at least include the following "scopes":
持牌人須提供一份操作手冊，說明有關持牌車輛的運作、整潔、管理、保安、緊急情況的應變準備等事宜的程序，用以訓練司機及所有操作人員並給予他們指引。該手冊須任何時間存放於司機駕駛室內，而該等程序須最少涵蓋以下「範圍」：
*Delete as appropriate 刪去不適用者

38.1 The driver should only use the licensed vehicle to convey dangerous goods of Class(es) permitted by the subject licence at any one time.
無論在任何時間，司機只准使用持牌車輛運送牌照上所准許的類別的危險品。

38.2 The driver should properly display the identification disc and the signs as specified in the fire safety requirements no. 32 to 35 when he / she is using the licensed vehicle to convey dangerous goods.
於使用持牌車輛運送危險品期間，司機必須正確地展示識別牌及此消防安全規定第 32 至 35 項所指明的各項標誌。

38.3 The driver and/or operators should only transfer the dangerous goods directly from the licensed vehicle to an approved tank, a receptacle located in a licensed factory or licensed store, or a receptacle located in a premises in which the storage of dangerous goods is exempt from the operation of section 6 of the Ordinance under the Dangerous Goods (Application and Exemption) Regulation 2012 (Cap. 295 sub. Leg. E).
司機及／或操作人員只准直接從持牌車輛運送危險品至獲准貯槽、處於持牌工廠或獲准貯存所之內的貯槽、或處於已根據《2012 年危險品(應用及豁免)條例》(香港法例第 295E 條)就貯存該危險品已獲豁免不受本條例第 6 條所管制的處所之內的容器。

38.4 The driver and/or operators should not smoke, carry a lighted cigarette, cigar or pipe, or carry a naked flame when they are using the licensed vehicle to convey dangerous goods, or loading dangerous goods onto, or unloading dangerous goods from, the vehicle.
於使用持牌車輛運送危險品期間或進行上貨／卸貨、人油／卸油或人氣／卸氣程序期間，司機及／或操作人員不得吸煙、攜帶已點燃的香煙、雪茄或煙斗、或攜帶無煙蓋火筒。

安全資料表
Safety Data Sheet

一、化學品識別資料
化學品名稱：壓縮空氣 (Compressed Air) 化學品編號：
其它名稱：工業級空氣、壓縮空氣
結構用途及限制使用：-
製造商、輸入商或供應商名稱、地址及電話：
緊急聯絡電話/傳真號碼：
二、危害辨識資料
化學品危害分類：加壓氣體
標內內容：

象形圖號：加壓氣體
警告：警告
危害說明：內含加壓氣體，遇熱可能爆炸或導致氣瓶破裂。 置於通風處。
其他說明：置於通風良好地方
僅供工業使用，嚴禁人員呼吸使用。
其它危害：-
三、成分/組分資料
混合物：
中(高)壓氣體：壓縮空氣 (AIR, Compressed)
別名名稱：工業級空氣、壓縮空氣
化學文摘社文摘號碼(CAS No.): 131059-10-0
化學物質成分(或混合物成分): 100%

安全數據表
Safety Data Sheet

產品名稱：壓縮空氣 (Compressed Air)
產品編號：
製造商/輸入商：
緊急聯絡電話/傳真號碼：
四、理化特性
外觀：無色氣體
氣味：無味
沸點：-196°C
凝固點：-196°C
蒸氣壓：0.1 MPa (20°C)
密度：1.29 g/L (20°C)
溶解性：不溶於水
五、毒理資料
急性毒性：無
慢性毒性：無
六、環境資料
生態毒性：無
持久性/累積性：無
七、廢棄處理
廢棄方法：按當地環保部門規定處理
八、運輸資料
UN 編號：1010
危險類別：2.2
包裝類別：III
九、其他資料
其他說明：本產品為工業用途，嚴禁人員呼吸使用。



Fire Safety Requirements (Cap. 295G VS Cap. 295B)

Samples in Application Guidebook

DG/TS/126B (Rev. 04/22)



**STANDARD FIRE SAFETY REQUIREMENTS FOR VEHICLES USED FOR
CONVEYANCE OF CLASS 2 / 3 / 3A DANGEROUS GOODS**
運送第 2 / 3 / 3A 類危險品的車輛的標準消防安全規定

Applicability of DG/TS/126B (Rev. 04/22)
DG/TS/126B (Rev. 04/22) 的適用範圍
Tank Vehicle used for conveyance of Class 3 / 3A dangerous goods
運送第 3 / 3A 類危險品的貯槽車輛

DESIGN and CONSTRUCTION
設計及建造

ENGINE (引擎)

1. The engine of the vehicle shall be the type of compression ignition (Diesel).
車輛的引擎須為壓縮點火式(柴油)。
2. The exhaust system of the engine shall be situated wholly in front of the fire resisting shield and the discharge shall be arranged to offside of the vehicle.
引擎的排氣系統須全部位於防火板前及須由車旁右面排氣。
3. For any fuel pipe forming part of a gravity feed system, the fuel feed pipe shall be fitted with a quick action cut-off valve situated in an easily accessible position and clearly marked as such.
任何構成重力供應系統一部分的燃料管須安裝一個快速切斷閥，其位置須容易接近及以標記清楚標明。

FUEL TANK (油箱)

4. The fuel tank shall be:
油箱須：
 - 4.1 complied with a double cases construction;
符合雙重包箱構造；
 - 4.2 screened from the body by a fire resisting shield;
加裝防火板使其與車身隔離；
 - 4.3 protected from blows by strong steel guards or by the frame of the body chassis of the vehicle; and
以堅固鋼板或車身底盤架作保護以抵擋碰撞；及
 - 4.4 fitted with a lock to the fuel tank lid.
在入油箱蓋處加鎖。

DESIGN and CONSTRUCTION
設計及建造

ELECTRICAL INSTALLATION AND FITTINGS
電力安裝及裝置

FIRE SERVICE INSTALLATION OR EQUIPMENT
消防裝置或設備


SIGNS (INCLUDING NOTICE AND PLACARD)
標誌 (包括告示及標示牌)

**OPERATION, HOUSEKEEPING, MANAGEMENT, SECURITY,
STAFF TRAINING and EMERGENCY PREPAREDNESS**
運作、整理、管理、保安、員工培訓及緊急情況的應變準備等



Application for Conveyance Licence

- New Application (Cap. 295G)
- Renewal of Licence (Cap. 295B or Cap. 295G)

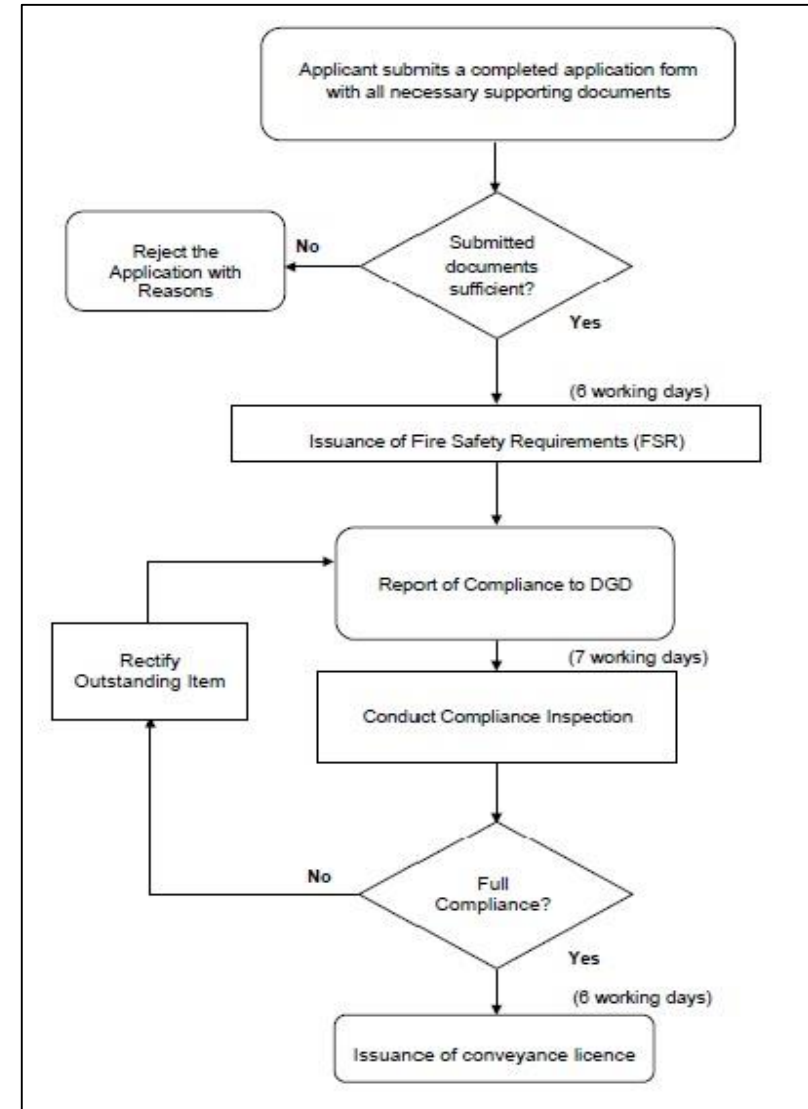

New Application

- Application under Dangerous Goods (Control) Regulation, Cap. 295G
- New Application Form
- New set of Fire Safety Requirements
- Transitional period NOT applied



For Internal Use Only 只供內部填寫
LFRPS Case No.:
File Ref.:
Receiving Officer:
Receipt Date:

FIRE SERVICES DEPARTMENT
香港消防處
Application for / Renewal of
Conveyance Licence for Schedule 2 Dangerous Goods (Class 2/3/3A)
附表 2 危險品(第 2/3/3A 類)運送牌照的申請/續期
[This form is only applicable to application / renewal of licence during transitional period]
[此表格只適用於過渡期間的牌照申請/續期]

Section A 甲部
Part 1: Nature of Application
第一部份：申請類別

☐ Renewal Application under Dangerous Goods (General) Regulations, Cap. 295B
根據第 295B 章《危險品(一般)規例》申請續牌
**The last valid date to be endorsed on Cap. 295B Licence is 30 March 2024*
**Cap. 295B 牌照可能註的最後有效日期為 2024 年 3 月 30 日*
Please skip Parts 3a, 3b of Section C
不用填寫丙部第三 a 及第三 b 部份

☐ Licence Application under Dangerous Goods (Control) Regulation, Cap. 295G
根據第 295G 章《危險品(管制)規例》申請牌照
**Applicable to i) New Applicant and ii) Cap. 295B Licensee*
**適用於 i) 新申請人 和 ii) 第 295B 章牌照持有人*

☐ Renewal Application under Dangerous Goods (Control) Regulation, Cap. 295G
根據第 295G 章《危險品(管制)規例》申請續牌
**Applicable to Cap. 295G Licensee*
**適用於第 295G 章牌照持有人*
Please skip Parts 3a, 3b of Section C
不用填寫丙部第三 a 及第三 b 部份

Section B 乙部
Part 2a: Particulars of Applicant (Please attach supplementary sheet(s) if space provided is insufficient)
第二 a 部份：申請人資料 (如空位不敷應用，請另用附頁)

☐ Applicant is a company 申請人為公司
☐ Applicant is an individual / a sole proprietorship / a partnership 申請人為個人/ 獨資業務/ 合股業務

Licence Number 牌照編號 (For renewal only) (只適用於續牌)	Expiry Date 屆滿日期 (DD/MM/YYYY)
Vehicle Registration Mark 車輛登記號碼	
Name of Applicant 申請人名稱	

(English)
(中文)

- ☐ Licence Application under Dangerous Goods (Control) Regulation, Cap. 295G
根據第 295G 章《危險品(管制)規例》申請牌照
**Applicable to i) New Applicant and ii) Cap. 295B Licensee*
**適用於 i) 新申請人 和 ii) 第 295B 章牌照持有人*

Renewal of Licence

- ❑ New Application Form
- ❑ Renewal Notification from FSD
- ❑ Two-year Transitional Period
 - Option 1: 295B → 295B
 - Option 2: 295B → 295G
- ❑ FSR (issued when the licence was first granted) remain in force and valid
- ❑ Addendum to FSR
- ❑ Compliance Inspection



For Internal Use Only 只供內部填寫
LIPPS Case No.:
File Ref.:
Receiving Officer:
Receipt Date:



FIRE SERVICES DEPARTMENT
香港消防處
Application for / Renewal of
Conveyance Licence for Schedule 2 Dangerous Goods (Class 2/3/3A)
附表 2 危險品(第 2/3/3A 類)運送牌照的申請/續期
[This form is only applicable to application / renewal of licence during transitional period]
[此表格只適用於過渡期間的牌照申請/續期]

Section A 甲部
Part 1: Nature of Application
第一部份：申請類別

☐ Renewal Application under Dangerous Goods (General) Regulations, Cap. 295B
根據第 295B 章《危險品(一般)規例》申請續牌
**The last valid date to be endorsed on Cap. 295B Licence is 30 March 2024*
**Cap. 295B 牌照可批註的最後有效日期為 2024 年 3 月 30 日*
Please skip Parts 3a, 3b of Section C
不用填寫丙部第三 a 及第三 b 部份

☐ Licence Application under Dangerous Goods (Control) Regulation, Cap. 295G
根據第 295G 章《危險品(管制)規例》申請牌照
**Applicable to i) New Applicant and ii) Cap. 295B Licensee*
**適用於 i) 新申請人 和 ii) 第 295B 章牌照持有人*

☐ Renewal Application under Dangerous Goods (Control) Regulation, Cap. 295G
根據第 295G 章《危險品(管制)規例》申請續牌
**Applicable to Cap. 295G Licensee*
**適用於第 295G 章牌照持有人*
Please skip Parts 3a, 3b of Section C
不用填寫丙部第三 a 及第三 b 部份

Section B 乙部
Part 2a: Particulars of Applicant (Please attach supplementary sheet(s) if space provided is insufficient)
第二 a 部份：申請人資料 (如空位不敷應用，請另用附頁)

☐ Applicant is a company 申請人為公司
☐ Applicant is an individual / a sole proprietorship / a partnership 申請人為個人/ 獨資業務/ 合股業務

Licence Number 牌照編號 (For renewal only) (只適用於續牌)	Expiry Date 屆滿日期 (DD/MM/YYYY)	
Vehicle Registration Mark 車輛登記號碼		
Name of Applicant 申請人名稱		(English) (中文)

What is the Addendum?

- Additional clauses added on the previous issued FSR
 - **Clause 1:** Confirm the validity of the FSR
 - **Clause 2:** Heading and Particulars - Terminology & Classification
 - **Clause 3:** Specific Items of the FSR - Signs & Operation Manual

Addendum to Fire Safety Requirements

This Addendum is issued for adding the following clauses into the Fire Safety Requirements issued on XX.XX.2021 ("the Fire Safety Requirements") in respect of the Licence with Licence No. XXXXX for the purpose of granting a new licence in accordance with the Dangerous Goods (Control) Regulation, Cap. 295G.

Clause (1) – Validity of the Fire Safety Requirements

1.1 The Fire Safety Requirements shall remain in force except amendments as stipulated in clauses (2) to (3) below to be made.

1.2 The granting of a new licence in accordance with the Dangerous Goods (Control) Regulation, Cap. 295G is subject to the compliance with the Fire Safety Requirements including the compliance with the amendment as stipulated in clauses (2) to (3).

Clause (2) – Heading and Particulars, etc. of the Fire Safety Requirements

2.1 Heading of the Fire Safety Requirements is replaced by:

STANDARD FIRE SAFETY REQUIREMENTS FOR VEHICLES USED FOR CONVEYANCE OF CLASS 2 / 3 / 3A DANGEROUS GOODS
運送第 2 / 3 / 3A 類危險品的車輛的標準消防安全規定

2.2 The following particulars indicating the type of vehicle and Class(es) of dangerous goods to be applied are inserted:

Tank Vehicle used for conveyance of Class 3 / 3A dangerous goods
運送第 3 / 3A 類危險品的貯槽車輛

Clause (3) – Specific items of the Fire Safety Requirements


3.1 Signs (including notices)

3.1.1 The following signs, notices, etc shall be **REMOVED** from the vehicle:


3.1.1.1 Removal of all the category of the dangerous goods in English and Chinese characters
移除所有危險品類別的中英文字樣

3.1.2.4.2 for tank compartments carrying different cargo;
如貯槽分隔開盛載不同貨物的情況：

3.1.2.4.2.1 Display of a HAZCHEM code plate complying with the following specifications and colour scheme at a conspicuous place on both sides and the rear of the vehicle.
符合以下所示規格及配色的 HAZCHEM 代號牌，並展示於車輛兩邊及後邊的顯眼處



3.1.2.4.2.2 Display of an identification plate complying with the following specifications and colour scheme at the exterior on both sides of each tank compartment of the vehicle. English and Chinese PSN of the actual dangerous goods carried by each compartment shall be displayed above the UN no. / HK no. on the identification plates. (UN1203 "PETROL 汽油" and H301 "DIESEL 柴油" are shown below as examples)



3.1.2.5 (Reserved)

3.1.2.6 (Reserved)

3.1.2.7 Display of a "NO SMOKING 不准吸煙" notice with character size of not less than 120 mm in height at a conspicuous place on both sides of the vehicle.
[The notice shall be made of reflective white or silver letters and characters on a red background. English letters with height and width in the proportion of 2:1 (e.g. 120 mm letters with 60 mm width). A 6 mm spacing for each letter is recommended]
"NO SMOKING 不准吸煙" 告示牌，字體高度須不少於 120 毫米，並展示於車輛兩邊的顯眼處
[告示牌須用反光的白色或銀色中英文字寫在紅底板上；英文字母的高度和闊度的比例須為 2:1 (高度 120 毫米的字體即為 60 毫米闊)；字母間亦須相距 6 毫米]

3.1.2.8 Storage of one portable "NO SMOKING 不准吸煙" notice with character size of not less than 120 mm in height on the vehicle.
[The notice shall be made of reflective white or silver letters and characters on a red background. English letters with height and width in the proportion of 2:1 (e.g. 120 mm letters with 60 mm width). A 6 mm spacing for each letter is recommended]
一個 "NO SMOKING 不准吸煙" 手提告示牌，字體高度須不少於 120 毫米，並存放於車上
[告示牌須用反光的白色或銀色中英文字寫在紅底板上；英文字母的高度和闊度的比例須為 2:1 (高度 120 毫米的字體即為 60 毫米闊)；字母間亦須相距 6 毫米]

3.1.2.9 (Reserved)

3.2 Operation, Housekeeping, Management, Security, Staff Training and Emergency Preparedness

3.2.1 Provision of an operation manual containing procedures in respect of the operation, housekeeping, management, security, emergency preparedness of the licensed vehicle shall be provided for training and guidance to the driver and all operators, and storage of such manual in the driver's cab at all times. The procedures contained in the manual shall at least include the following scopes:
提供一份操作手冊，並在任何時間存放於司機駕駛室內。該手冊須說明有關該貯槽車輛的運作、整潔、管理、保安、緊急情況的應變準備等事宜的程序，用以訓練司機及所有操作人員，並給予他們指引，而該等程序須最少涵蓋以下範圍：



DG Vehicle Inspection Booking System



香港特別行政區政府
消防處

A A A | EN 繁體



新修訂危險品條例
2022年3月31日
生效

危險品 規管有道 新法例 安居保民

24個月過渡期 提升安全 利民便商

按聯合國/香港編號或正式運輸名稱搜尋危險品

危險品

A red arrow points from the bottom right towards the menu icon in the top right corner.



DG Thematic Website
www.hkfsd.gov.hk/dg

DG Vehicle Inspection Booking System



香港特別行政區政府
消防處



A A A | EN 繁體



危險品的管制



什麼是危險品？



包裝、標記、標籤



牌照



壓力氣體容器



資料與數據



常見問題



聯絡我們



DG Thematic Website

www.hkfsd.gov.hk/dg

DG Vehicle Inspection Booking System



DG Thematic Website
www.hkfsd.gov.hk/dg

DG Vehicle Inspection Booking System



DG Thematic Website
www.hkfsd.gov.hk/dg

DG Vehicle Inspection Booking System



檢驗危險物品車輛預約

第一步
選擇申請類別

第二步
輸入案件資料

第三步
輸入預約日期

第四步
確認通知書

技術支援
電郵至
hkfssdenq@hkfsd.gov.hk

第一步 選擇申請類別

請選擇申請類別

申請類別

- ☒ 新申請危險品車輛牌照 / 根據經修訂的《危險品條例》首次續領危險品車輛牌照
- ☐ 其他續領危險品車輛牌照
- ☐ 更改預約日期

繼續

第一步 / 共四步



DG Vehicle Inspection Booking System

 檢驗危險物品車輛預約

第一步
選擇申請類別

**第二步
輸入案件資料**

第三步
輸入預約日期

第四步
確認通知書

技術支援
電郵至
hkfsdenq@hkfsd.gov.hk

請輸入新申請危險物品車輛預約檢驗資料。

新申請檢驗預約資料

LIFIPS編號:*
車牌號碼:*
本處檔號("I"之後三至五位數字):*



繼續

第三步 / 共四步



DG Vehicle Inspection Booking System



 檢驗危險物品車輛預約

第一步
選擇申請類別

第二步
輸入案件資料

第三步
輸入預約日期

第四步
確認通知書

技術支援
電郵至
hkfdsenq@hkfsd.gov.hk

第三步 輸入預約日期

請輸入新申請危險物品車輛預約檢驗資料。

新申請檢驗預約資料

LIFIPS編號:
車牌號碼:*
本處檔號("I"之後三至五位數字):*
水容量測試 否
電郵地址:*
申請人/代理人聯絡:*
☐ 再檢驗
預約檢驗日期:*
上一次檢驗日期:
請輸入圖片上的文字與數字:

June 2022

Su	Mo	Tu	We	Th	Fr	Sa
			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30		

繼續

第三步 / 共四步

第295G章 《危險品(管制)規例》第134條

禁止直接從持牌車輛轉注危險品

- (1) 任何人不得直接將燃料從持牌車輛轉注入任何另一車輛或船隻的油箱。
- (2) 任何人不得直接從持牌車輛轉注危險品至另一持牌車輛上的貯槽。

一經定罪，
可處第4級罰款
(\$25,000)





消防處

Fire Services Department

Thank You!





消防處

Fire Services Department

Q & A Session

Select Icon
選擇圖案



Q & A Panel
問與答面板

“All Panelists”
選“所有答疑者”

Input Text
打字提問


More Information

❖ General Enquiry:

➔ hkfsd_dg_enq@hkfsd.gov.hk

❖ Code of Practice, “Application Guide”, Pamphlets, Videos:

➔ **DG Thematic Website** (www.hkfsd.gov.hk/dg)

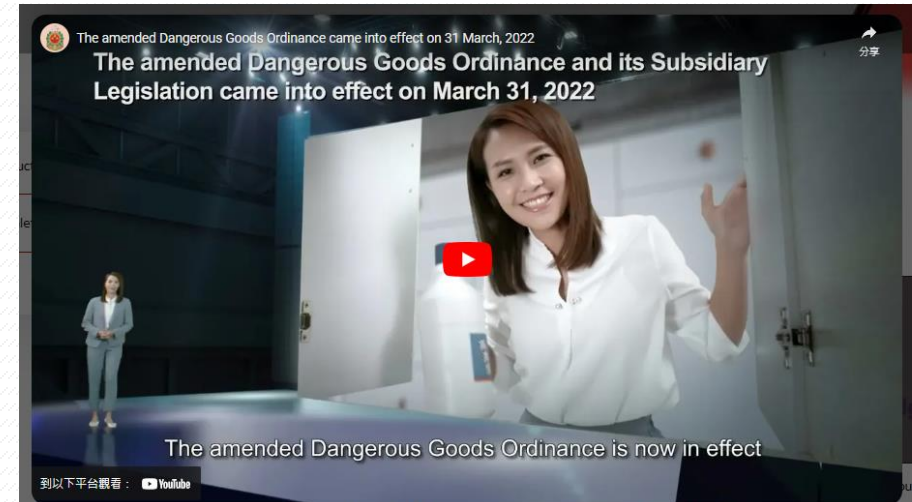


More Information

❖ Manufacture, Storage and Use of DG

➔ **Dangerous Goods Control Division (2417 5757)**

❖ Conveyance of DG, Pressure Receptacles & Approved Persons

➔ **Dangerous Goods Enforcement Division (3850 8487)**

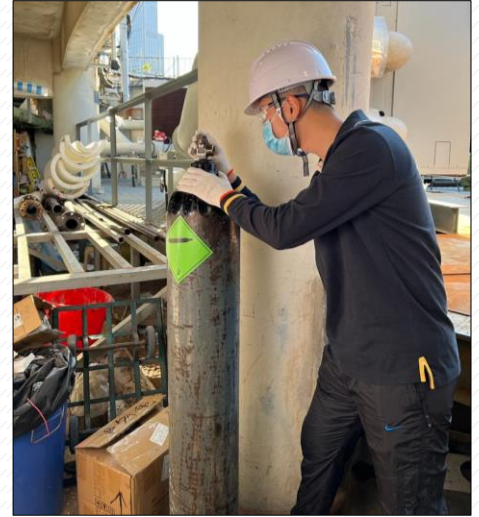

Report Fire Hazards

❖ DG or IFA Complaints:

➔ **Fire Services Communication Centre**

2723 8787 (24-hour)





消防處

Fire Services Department

To be Continued in Next Sharing...

